


CONCEPT, NOT FOR FABRICATION


StepClimber · github.com/BoujeeEnjinia1701/stepclimber

REV	DESCRIPTION	DATE	BY
P1	Concept sheet	2026-10-02	AC

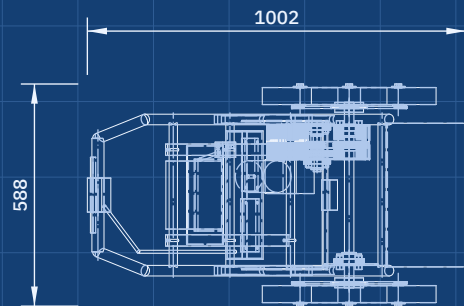


TOP VIEW

Scale 1:20; looking down (along -Z)

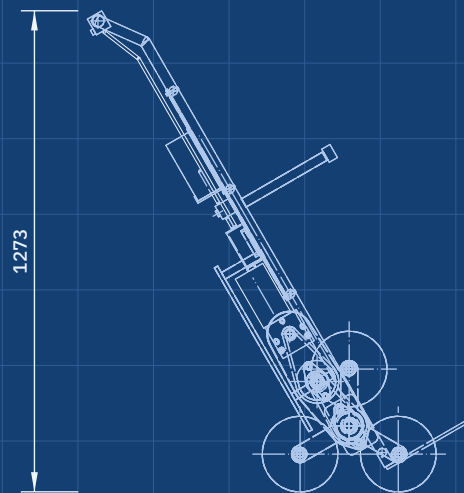


FRONT VIEW

Scale 1:20; looking at the front (along +Y)

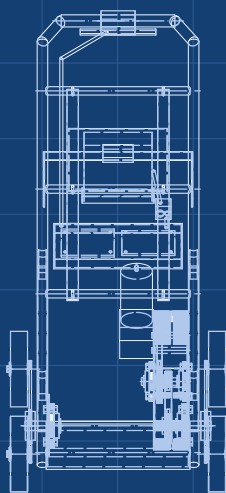

RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

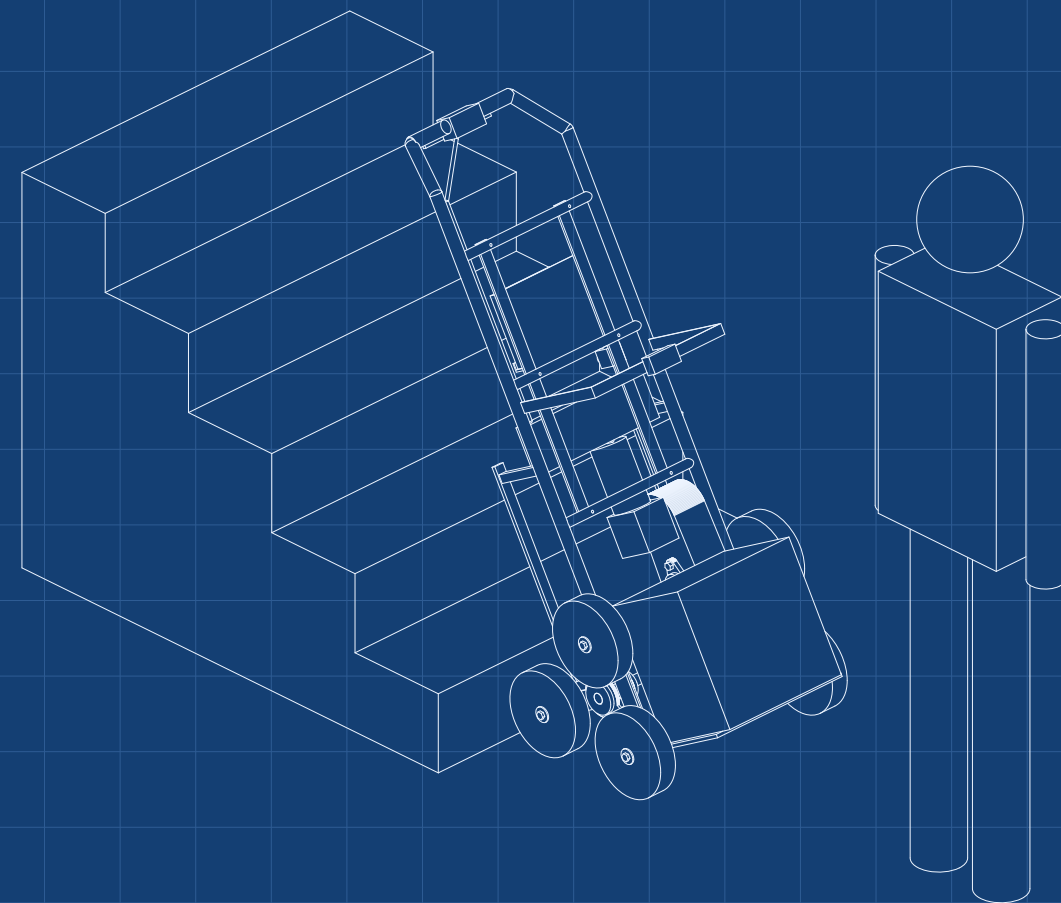

ISOMETRIC VIEW

Not to scale; figure is a 1.75 m person; seen from the front right and above, about 30 deg elevation

KEY FIGURES

Rated stair load 60 kg (132 lb) payload (decided)
Tri-star clusters: 200 mm wheels, 150 mm arms, 260 mm spacing
One step per 1/3 turn; 244 W peak at 16 steps/min (calc)
575 J (0.16 Wh) from the pack per loaded step up (calc)
About 1,215 loaded steps per 256 Wh charge (calc)
34.2 kg truck; R3, R5, R6 met on paper for the first prototype (SCM-CAL-001 v0.5)

STEPCLIMBER

github.com/BoujeeEnjinia1701/stepclimber

Powered tri-star hand truck concept

DRAWING NO. SCM-DWG-010			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Massing model for concept communication					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	