


CONCEPT, NOT FOR FABRICATION


StepClimber · github.com/BoujeeEnjinia1701/stepclimber

REV	DESCRIPTION	DATE	BY
P1	Concept sheet	2026-09-25	AC

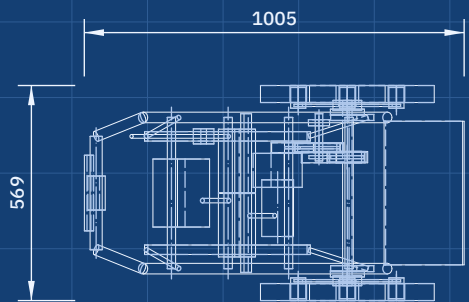


TOP VIEW

Scale 1:20; looking down (along -Z)

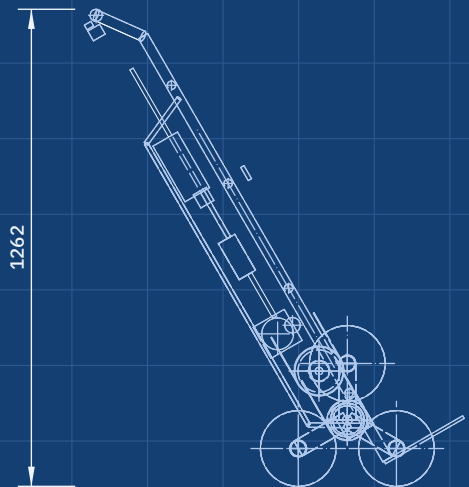


FRONT VIEW

Scale 1:20; looking at the front (along +Y)

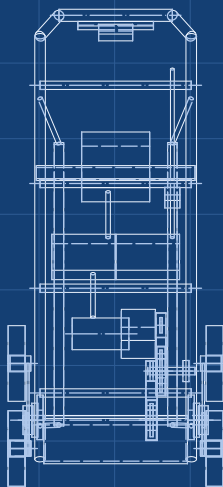

RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

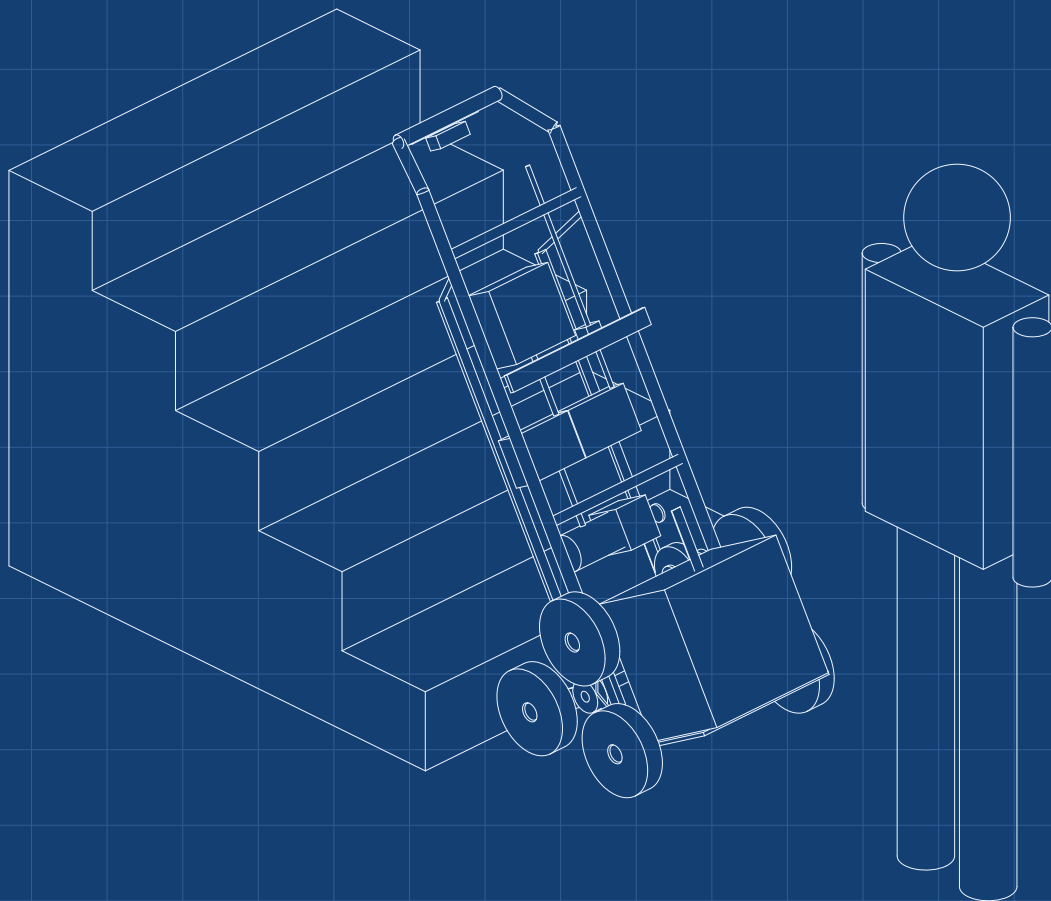

ISOMETRIC VIEW

Not to scale; figure is a 1.75 m person; seen from the front right and above, about 30 deg elevation

KEY FIGURES

Rated stair load 60 kg (132 lb) payload (decided)
Tri-star clusters: 200 mm wheels, 150 mm arms, 260 mm spacing
One step per 1/3 turn; 17 steps/min at 238 W peak (calc)
527 J (0.15 Wh) from the pack per loaded step up (calc)
About 1,330 loaded steps per 256 Wh charge (calc)
26.3 kg truck; \$633 parts; R6 not met (SCM-CAL-001 v0.2)

STEPCLIMBER

github.com/BoujeeEnjinia1701/stepclimber

Powered tri-star hand truck concept

DRAWING NO. SCM-DWG-010		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-09-25	DRAWN Amish Chadha
MATERIAL / NOTES Massing model for concept communication				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	