



CONCEPT, NOT FOR FABRICATION


REV	DESCRIPTION	DATE	BY
P1	Preliminary general arrangement, TRL 3	2026-09-25	AC




TOP VIEW
Scale 1:20

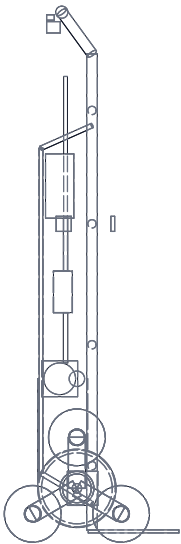


FRONT VIEW
Scale 1:20

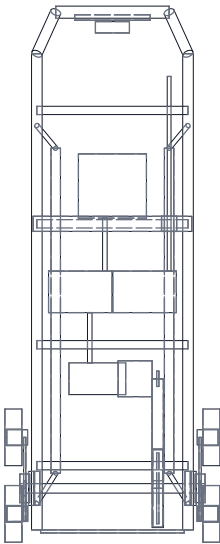

RIGHT VIEW
Scale 1:20

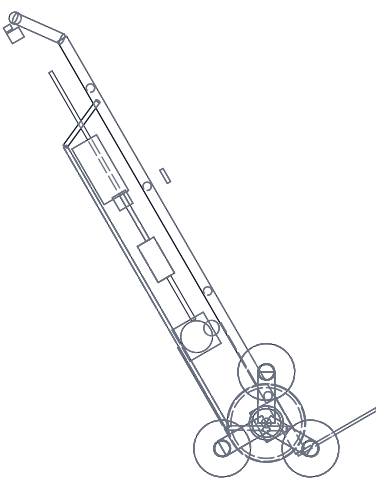

FRONT VIEW, CLIMBING POSE
Tilted 30 deg about the shaft; scale 1:20

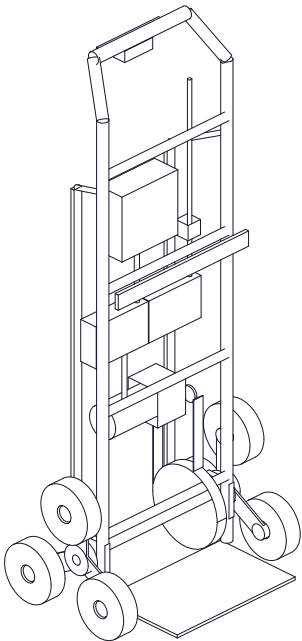

ISOMETRIC VIEW
Not to scale

KEY DIMENSIONS AND INTERFACES (MM)

- Overall width 569 (wheel outer faces); upright height 1418
- Clusters: arm 135, wheel dia 150, spacing 233.8
- Shaft 25 dia at 142.5 above floor; bearings 400 + 28 apart
- Cluster mid-planes 524 apart; rails 400 apart, 28 tube
- Chain 06B, 10T to 60T (6:1), centers 290
- Driven sprocket OD 187; guard radius 104 (limit 48, R15 not met)
- Grip 1260 from the shaft along the frame; toe plate 240 x 380
- Pack cradle 75 x 180 x 170, center 800 above shaft
- Climbing tilt 30 deg back from vertical; 60 kg rated stair load

STEPClimber

General arrangement

DRAWING NO. SCM-DWG-001			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-09-25		DRAWN Amish Chadha
MATERIAL / NOTES Steel frame and spiders; solid rubber wheels; see bom/bom.csv. Baseline drive fails R15 (SCM-CAL-001)					
Licensed CERN-OHL-S-2.0 · Open Hardware Portfolio · amishchadha.com					Generated from cad/src; do not edit by hand