



CONCEPT, NOT FOR FABRICATION


REV	DESCRIPTION	DATE	BY
P1	Concept sheet	2026-09-25	AC

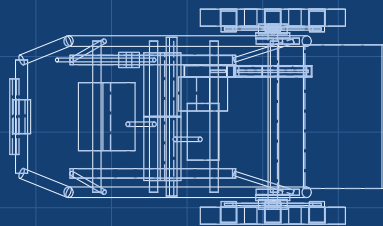


TOP VIEW
Scale 1:20

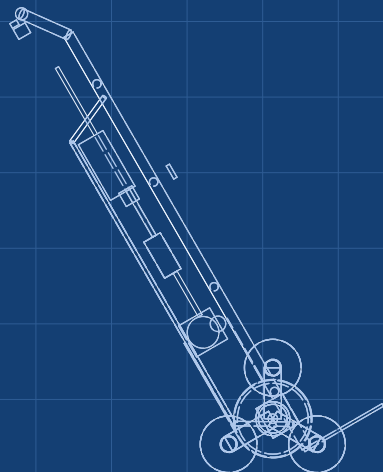

FRONT VIEW
Scale 1:20

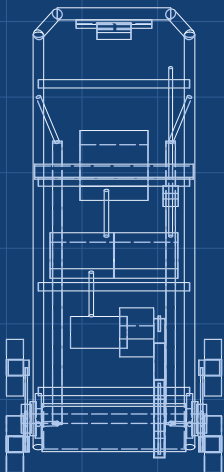

RIGHT VIEW
Scale 1:20

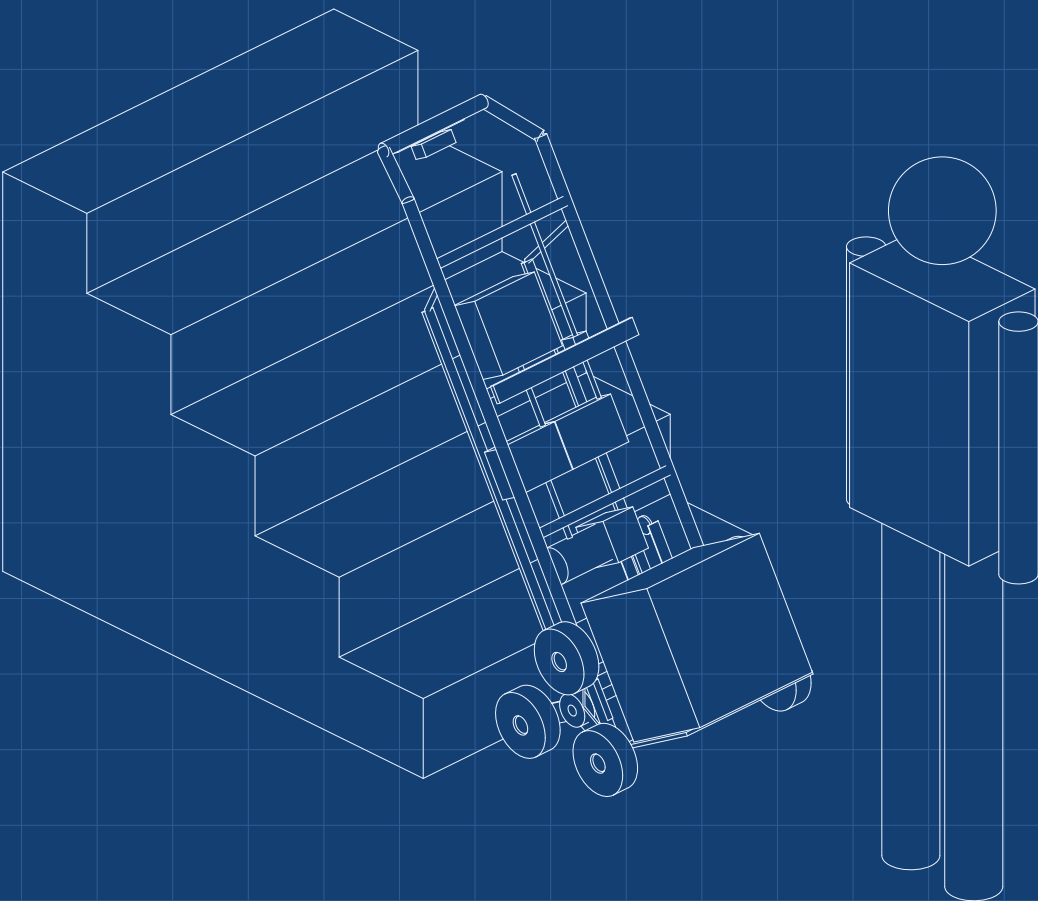

ISOMETRIC VIEW
Not to scale; figure is a 1.75 m person

KEY FIGURES

Rated stair load 60 kg (132 lb) payload (decided)
Tri-star clusters: 150 mm wheels, 234 mm wheel spacing
One step per 1/3 turn; 20 steps/min at 239 W peak (calc)
499 J (0.14 Wh) from the pack per loaded step up (calc)
About 1,390 loaded steps per 256 Wh charge (calc)
24.3 kg truck; \$580 parts; R2, R6, R15 not met (SCM-CAL-001)

STEPCLIMBER

Powered tri-star hand truck concept

DRAWING NO. SCM-DWG-010			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-09-25		DRAWN Amish Chadha
MATERIAL / NOTES Massing model for concept communication					
Licensed CERN-OHL-S-2.0 · Open Hardware Portfolio · amishchadha.com				Generated from cad/src; do not edit by hand	