



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:2; looking down (along -Z)

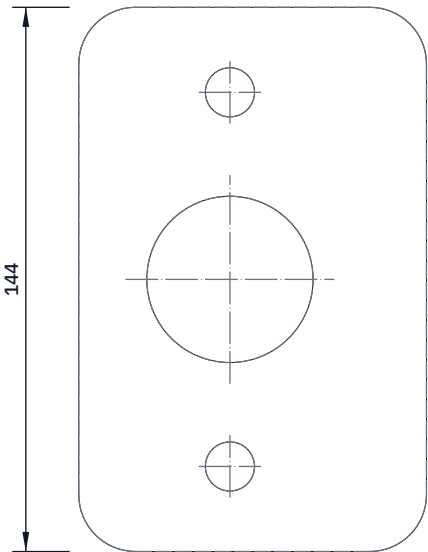


FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

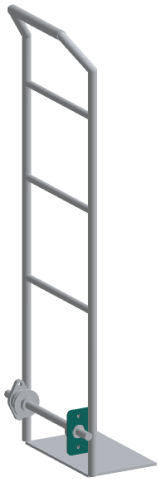

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Laser cut 92 x 144 mm, 15 mm corner radius, from 4 mm steel.

Bearing bore 44 mm: 40 mm from the back edge, 72 mm from the bottom.

Bearing bolt holes 13 mm, 49.5 mm above and below the bore centre.

The back edge faces the stair; the front edge faces the load.

Fit: weld it to the inside face of the left rail, its bore centre

40 mm behind the rail centre line and 142.5 mm above the toe plate.

Fillet weld both sides along the rail, 150 mm long.

Weld it with the outer case plate on a straight 25 mm bar through

both bores, so the two bores line up.

The 25 mm flange bearing bolts to its inside face with two M12

bolts, nyloc nuts on the outside.

Check: the bar turns freely in both bores after welding.

STEPCLIMBER

github.com/BoujeeEnjinia1701/stepclimber

StepClimber axle plate, plain side: making sketch

DRAWING NO. SCM-DWG-101			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Steel plate 4 mm, S275 or similar					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand