
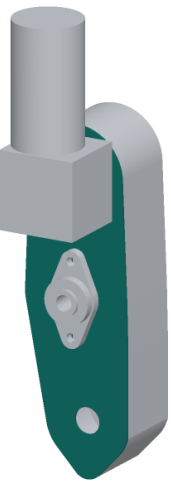
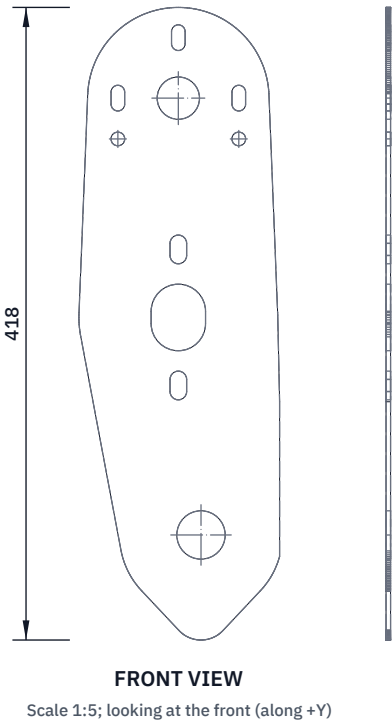


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Laser cut to the same outline as the outer plate, from 3 mm aluminium.

Holes from the main shaft centre, as on the outer plate, except:

- shaft hole 32 mm (clearance, no bearing on this plate);
- gearmotor output hole 28 mm, 289 mm up, 15 mm back;
- gearmotor screw slots 9 mm wide, 8 mm long up the plate: 40 mm either side of the output hole and 40 mm above it;
- countershaft bolt slots countersunk on the case side.

Spacers (make 2): 16 mm bar, 86 mm long, ends square, drilled 6.8 and tapped M8 20 deep at both ends.

Fit: the spacers stand between the plates on M8 screws, countersunk through the outer plate, button heads on this plate's outside.

Check: the plates are parallel, 86 mm apart, at the spacers.

STEPCLIMBER

github.com/BoujeeEnjinia1701/stepclimber

StepClimber chain case inner plate and spacers: making sketch

DRAWING NO. SCM-DWG-103			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium plate 3 mm, 5052 or 5083; spacers 16 mm steel bar					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand