


CONCEPT, NOT FOR FABRICATION


StepCue · github.com/BoujeeEnjinia1701/stepcue

REV	DESCRIPTION	DATE	BY
P1	Concept sheet	2026-10-01	AC

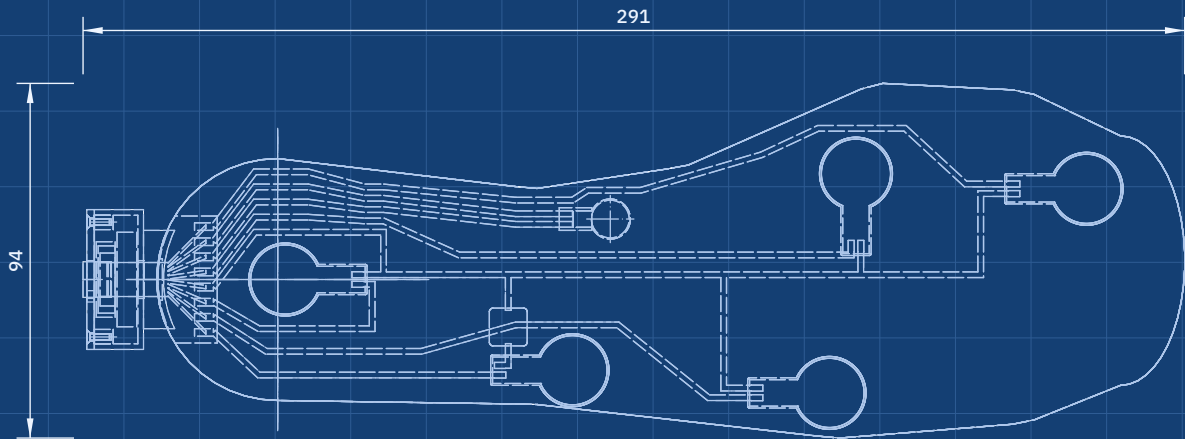


TOP VIEW

Scale 1:2; looking down (along -Z)

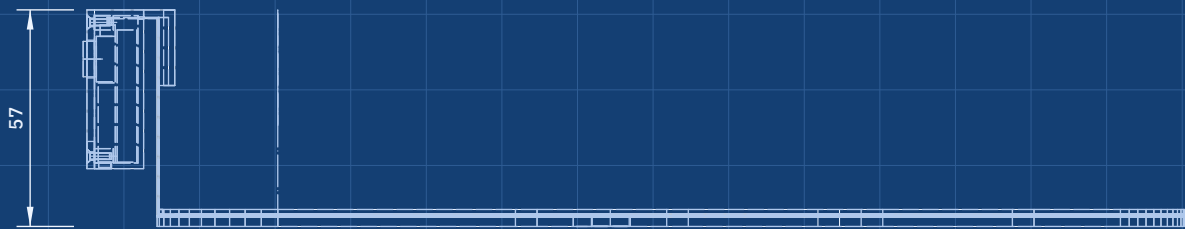


FRONT VIEW

Scale 1:2; looking at the front (along +Y)

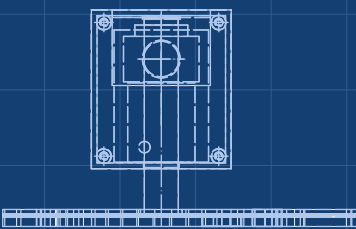

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

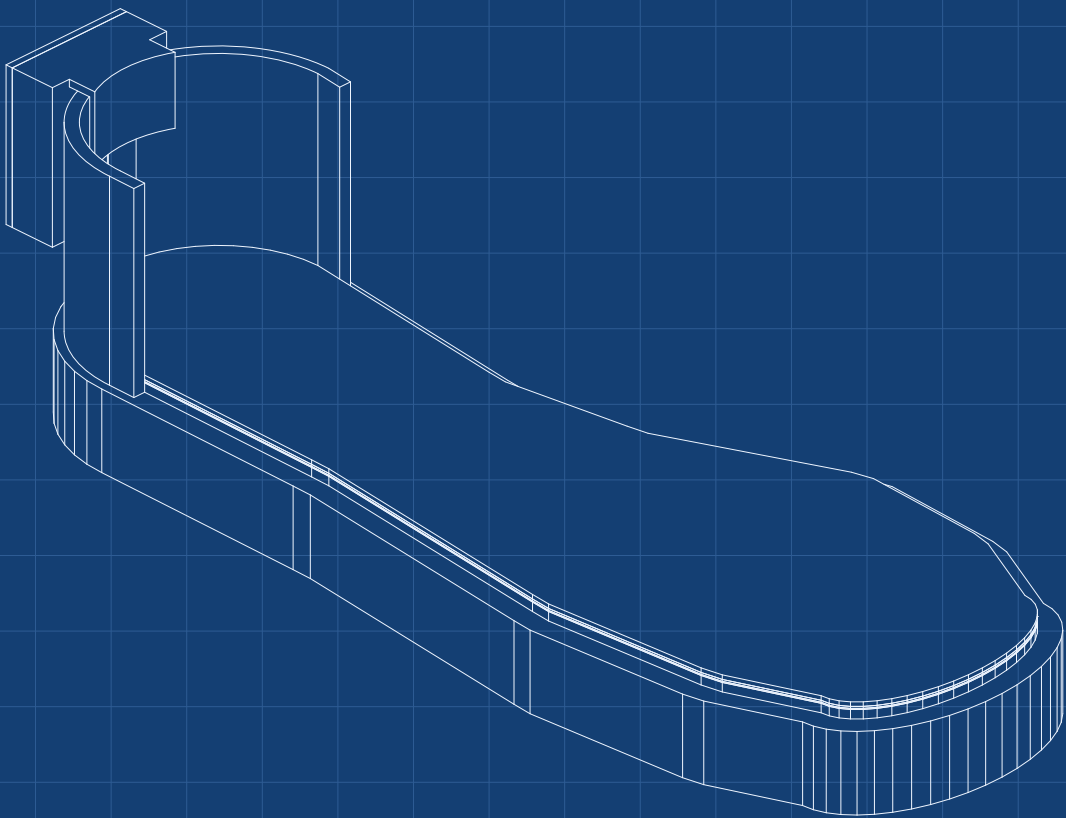

ISOMETRIC VIEW

Not to scale; grey is for scale; seen from the front right and above, about 30 deg elevation

KEY FIGURES

- 5 FSRs plus 6-axis IMU, sampled at 104 Hz
- Freeze decision every 0.25 s on a 2 s window
- Haptic cue at the wearer's cadence, 60 to 130 per min
- About 12 days per charge, 400 mAh (7 conservative)
- About \$90 in parts, one insole (STC-CAL-001)

STEP CUE

github.com/BoujeeEnjinia1701/stepcue

Cueing insole concept

DRAWING NO. STC-DWG-010			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Massing model for concept communication					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	