


CONCEPT, NOT FOR FABRICATION

StepCue · github.com/BoujeeEnjinia1701/stepcue

REV	DESCRIPTION	DATE	BY
P1	General arrangement for TRL 3 (STC-CAL-001)	2026-09-25	AC
P2	2.5 mm EVA base, 0.4 mm motor relief (STC-DDR-002)	2026-09-25	AC

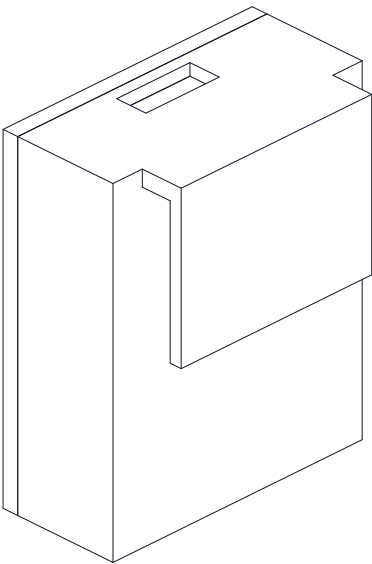


HEEL POD, ISOMETRIC

Not to scale; shoe omitted; seen from the front right and above, about 30 deg elevation


MAIN DIMENSIONS (MM)

Insole 272 long (EU 42); stack 2.5 EVA + 0.8 laminate + 1.2 cover = 4.5
FSRs 18.3 dia x 0.46, 5 sites: heel, lat. midfoot, MTH1, MTH5, hallux
Motor 10 dia x 2.7 under medial arch at X 120, Y 16; 0.4 relief in laminate underside
Flex tail 12 wide x 0.3, up inside the counter, over its top
Pod body 42 high x 34 wide x 15 deep; wall 1.5, lid 2.0
Clip: bridge 2 thick, finger 1.5 x 18 long, 26 wide
Clip gap 3.8 fitted (counter 3.5 + tail), 2.8 free
Cell 5.2 x 25 x 35; module 4.0 x 17.8 x 21, USB-C up
Pause button opening 10 dia; LED window 3 dia

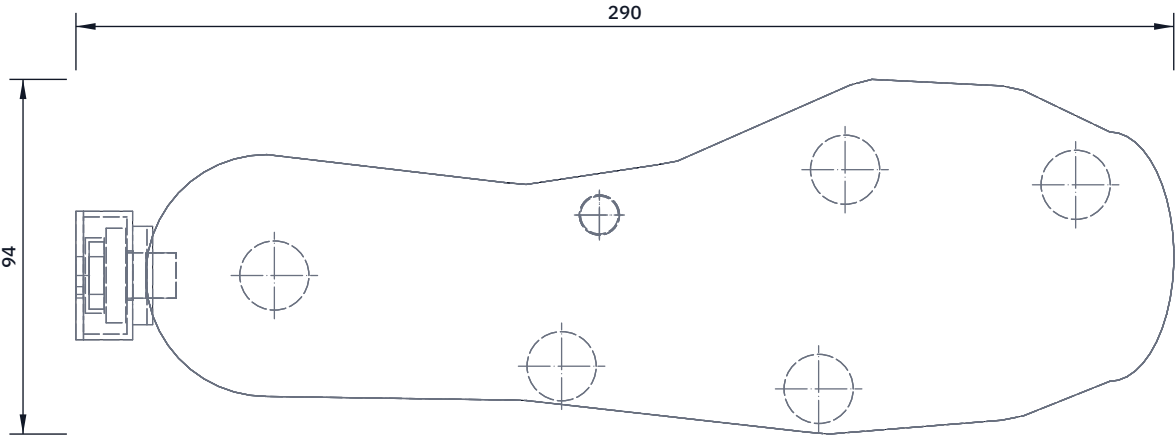


TOP VIEW

Scale 1:2; looking down (along -Z)

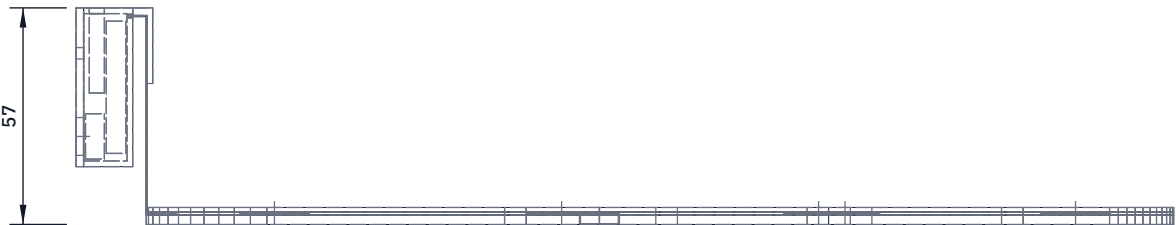

FRONT VIEW

Scale 1:2; looking at the front (along +Y)

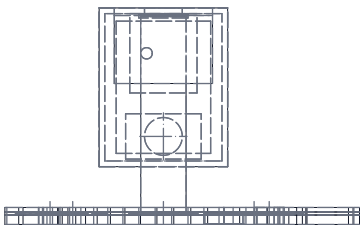

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

PARTS LIST (ITEMS MATCH BOM/BOM.CSV)

- 1 Top cover, PU foam
- 2 Force-sensing resistors (5)
- 3 Sensor laminate
- 4 Flat flex tail and connector
- 5 Coin vibration motor
- 6 Insole base, EVA foam

PARTS LIST, CONTINUED

- 7 Heel pod base with clip, PETG
 - 8 LiPo cell, 400 mAh protected
 - 9 Controller module with IMU
 - 10 Interface board, pause button
 - 11 Heel pod lid, PETG
- Not a medical device. Never charge while worn.

STEP CUE

github.com/BoujeeEnjinia1701/stepcue

Insole and heel pod general arrangement

DRAWING NO. STC-DWG-001		REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-09-25	DRAWN Amish Chadha
MATERIAL / NOTES Insole EVA, PET laminate, PU cover; pod PETG; bought parts per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand