1. TFT connector

Place an 8-pin connector on the PCB:

1 RST

2 CS

3 D/C

4 DIN

5 CLK

6 VCC

7 BL

8 GND

Connect it as:

TFT RST → ATmega pin 14

TFT CS → ATmega pin 16

TFT D/C → ATmega pin 15

TFT DIN → ATmega pin 17

TFT CLK → ATmega pin 19

TFT VCC → +5 V

TFT BL → +5 V

TFT GND → GND

2.shoot push button

ATmega pin 26

GND

3. game Start/restart push button

ATmega pin 25

GND

4.Buzzer

ATmega pin 5

GND

5.ATMEGA

atmega pin 7 vcc +5 V

atmega pin 8 GND GND

atmega pin 20 AVCC +5v

atmega pin 22 GND GND

6. Joystick connector

Most joystick modules have:

GND

VCC

VRx

VRy

SW

Your current game uses:

Joystick GND → GND

Joystick VCC → +5 V

Joystick VRx → ATmega PC0, pin 23

Joystick VRy → ATmega PC1, pin 24

Joystick SW → not connected

7. ATmega , pin 16 → 10 kiloogm resistor → +5v

8. One 100 nF ceramic capacitor between pin 7 (VCC) and pin 8 (GND).

One 100 nF ceramic capacitor between pin 20 (AVCC) and pin 22 (GND).

9.

11. RESET Pull-up (Recommended)


For a more robust PCB, add:

```
+5V
|
10kΩ
|
RESET (pin1)
```

This keeps the ATmega reset line stable. USBasp programming will still work correctly.



1.8 inch TFT Module 128X160 ST7735S

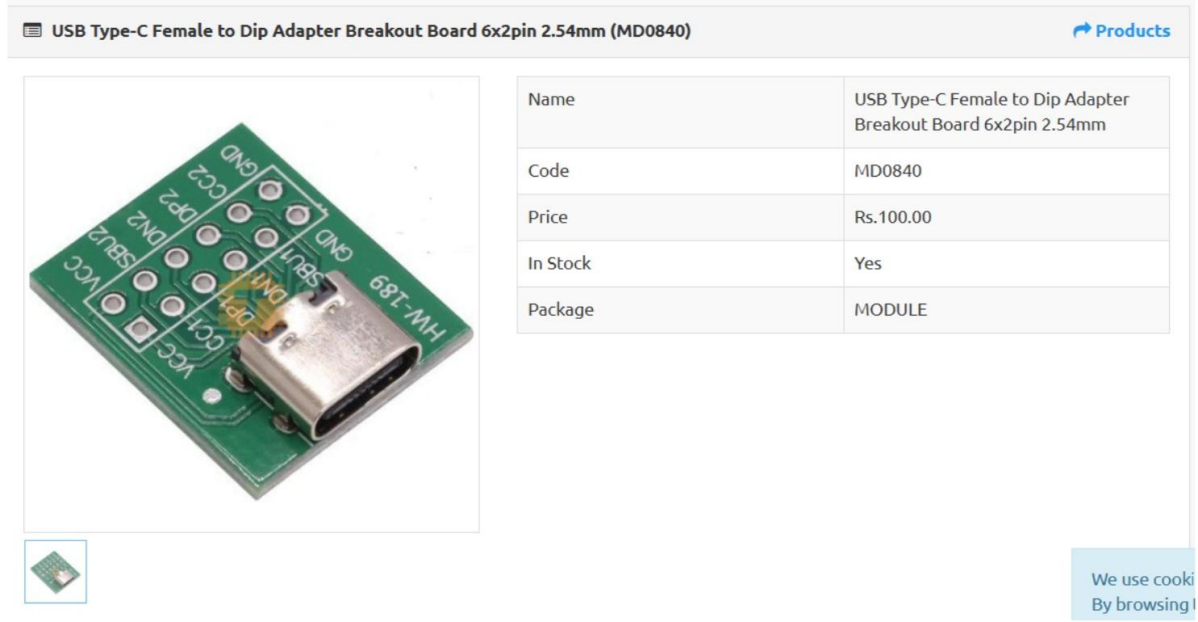

USB Type-C Female to Dip Adapter Breakout Board 6x2pin 2.54mm (MD0840)

Thumb Joystick Module for Arduino (MD0106) Products




Name	Thumb Joystick Module for Arduino
Code	MD0106
Price	Rs.140.00
In Stock	Yes
Package	MODULE

We use cook
By browsing

Thumb Joystick Module for Arduino (MD0106)

28-pin Normal IC Base 2.5mm (HE0021) Products

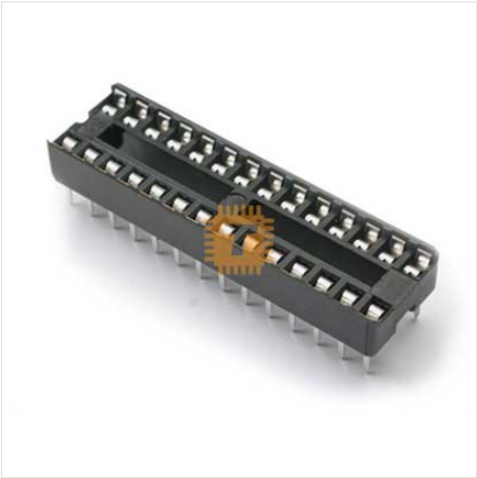

Name	28-pin Normal IC Base 2.5mm
Code	HE0021
Price	Rs.15.00
In Stock	Yes
Package	THT

We use cooki


28-pin Normal IC Base 2.5mm (HE0021)



40-pin Single row female headers 2.54mm (HE0005)



HYDZ buzzer

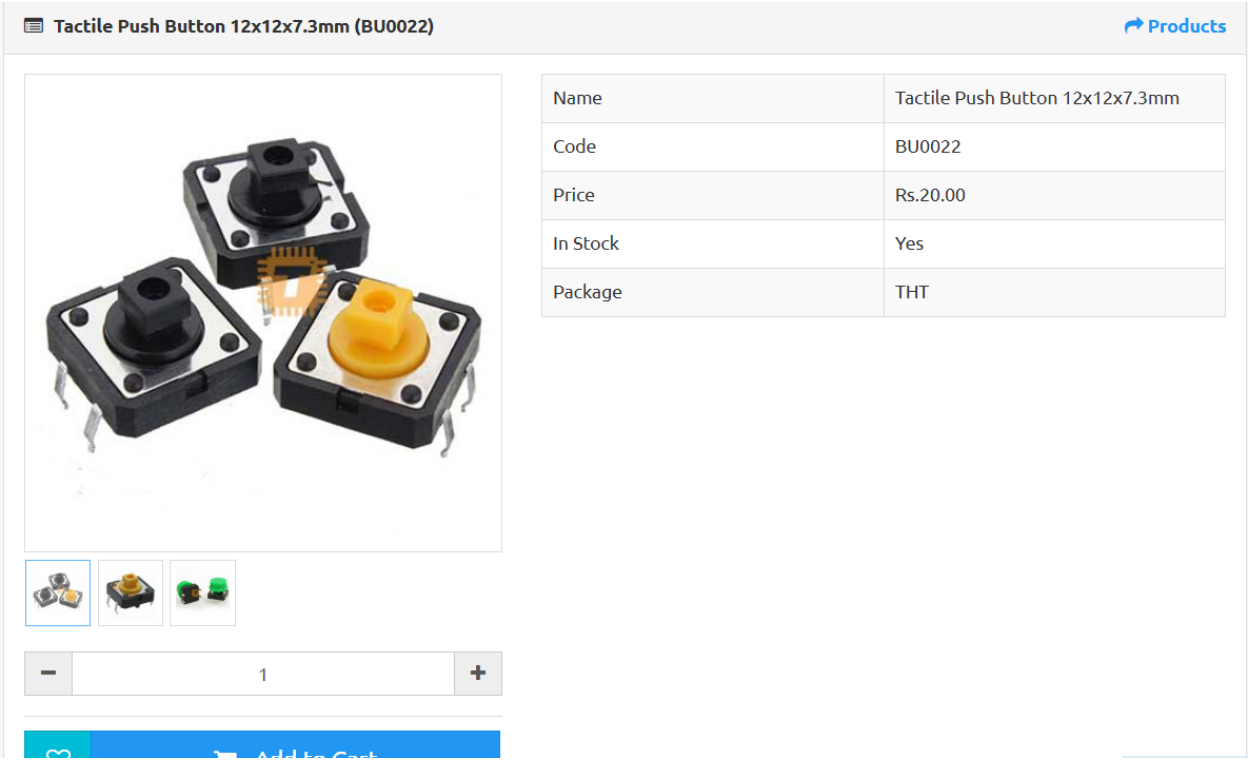

Tactile Push Button 12x12x7.3mm (BU0022)

