


CONCEPT, NOT FOR FABRICATION


StepGen · github.com/BoujeeEnjinia1701/stepgen

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA for TRL 3 (SGN-CAL-001), SwapCell v0.3	2026-09-25	AC
P2	Deck rails 60 x 30 x 2 (SGN-DDR-002)	2026-09-25	AC
P3	Design for construction (SGN-DDR-003)	2026-10-01	AC

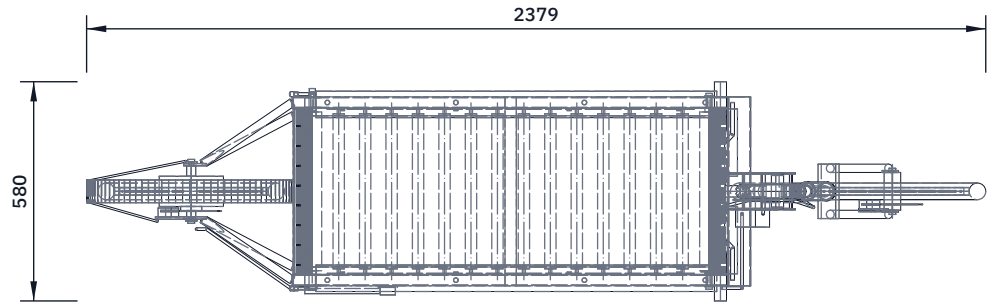


TOP VIEW

Scale 1:20; looking down (along -Z)

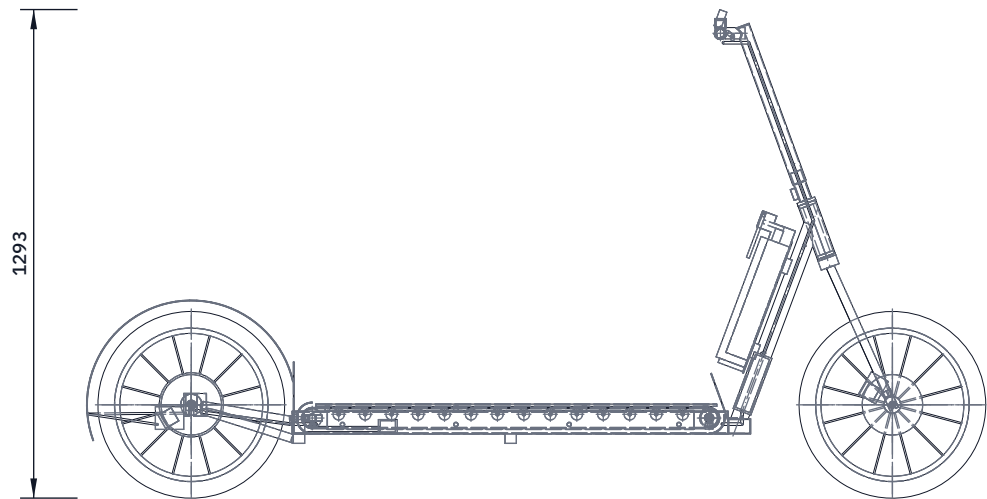


FRONT VIEW

Scale 1:20; looking at the front (along +Y)

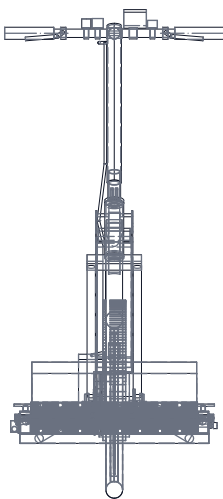

RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

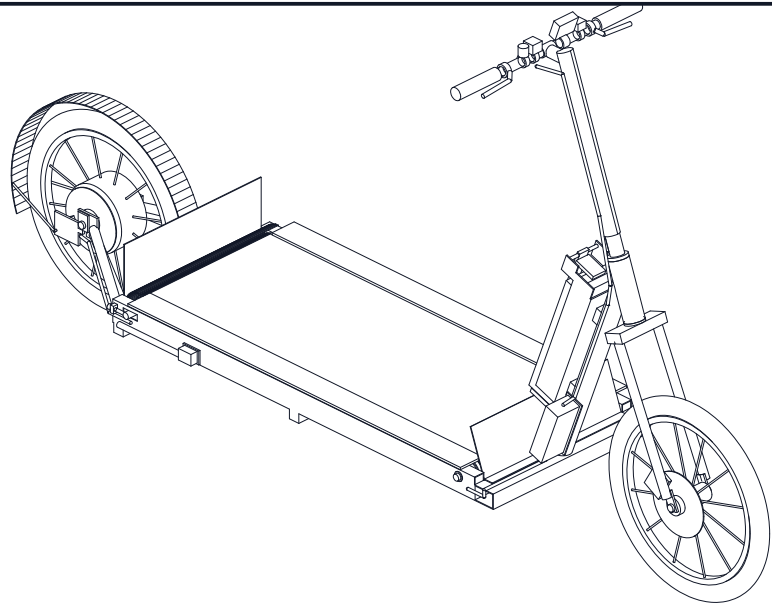

ISOMETRIC VIEW

Not to scale; seen from the front right and above, about 30 deg elevation

KEY DIMENSIONS (MM) AND INTERFACES

Overall 2379 long (fender) x 580 wide (bar) x 1293 high
Wheelbase 1855; 20 in (ETRTO 406) wheels, tire OD 494
Head angle 70 deg, fork offset 30, trail 58
Belt 400 wide; end rollers 1050 apart, usable 1000
Belt top 240 above ground; ground clearance 145
Bar 1230 above ground (990 above belt)
Lean clearance 33 deg (kickstand)
Deck rails 60 x 30 x 2 RHS; column 38 x 2; down tube 44 x 2
Head tube 50 x 3 machined, ZS44; fork 26 in size, 20 in wheel
SwapCell v0.3 receiver, latch class V1 on down tube:
preload 330 N via over-centre lever with detent,
10 kOhm INTERLOCK coding resistor in series with key
Mass about 35.1 kg without pack, 37.9 kg with pack
PRELIMINARY, NOT FOR FABRICATION

STEPGEN

github.com/BoujeeEnjinia1701/stepgen

General arrangement, walking-treadmill vehicle

DRAWING NO. SGN-DWG-001			REV P3	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-10-01	DRAWN Amish Chadha	

MATERIAL / NOTES
Frame: welded mild steel (S235 class) RHS and tube; guards Al sheet and HDPE. See bom/bom.csv