


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:10; looking down (along -Z)

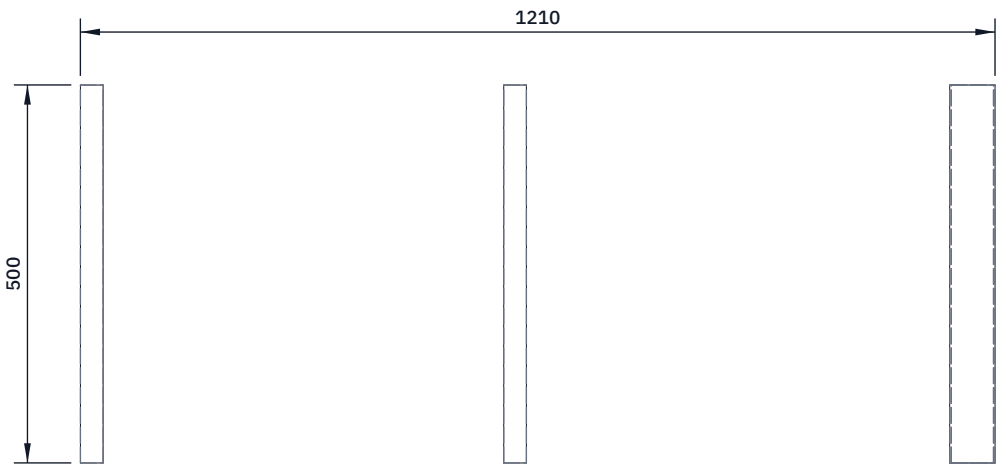


FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

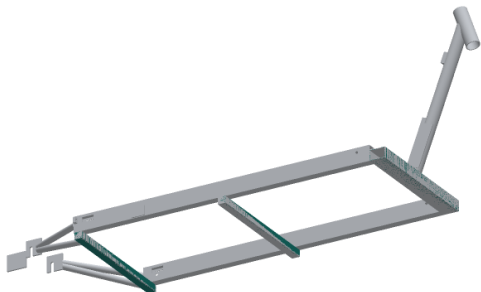

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cross members: cut two 500 mm lengths of 25 x 25 x 2 RHS.

They are welded under the rails, flush with the rails' outer faces:

rear one 0 to 30 mm from the rails' rear ends, middle one 560 to 590.

Drill two 9 mm holes in the top face of the rear one for M6 rivet nuts, 80 mm each side of centre, 14 mm from its front face (heel guard).

Nose beam: cut 500 mm of 60 x 40 x 2 RHS, lying flat (40 mm tall).

Its rear face butts the front ends of both rails, bottoms flush, outer ends flush with the rails' outer faces.

The down tube stands on the middle of its top face (sheet 103).

Four 9 mm holes in the top for M6 rivet nuts, 12 mm from the rear face, 80 and 180 mm each side of centre (toe guard flanges).

Cap every open RHS end with 2 mm plate, welded all round.

STEPGEN

github.com/BoujeeEnjinia1701/stepgen

StepGen cross members (make 2) and nose beam: making sketch

DRAWING NO. SGN-DWG-102			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Mild steel RHS 25 x 25 x 2 mm and 60 x 40 x 2 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	