




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

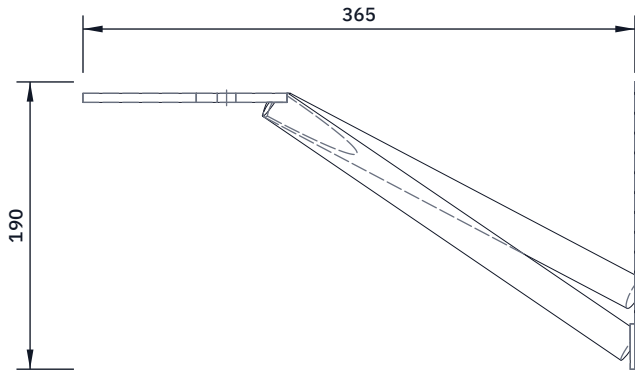

TOP VIEW
Scale 1:5; looking down (along -Z)

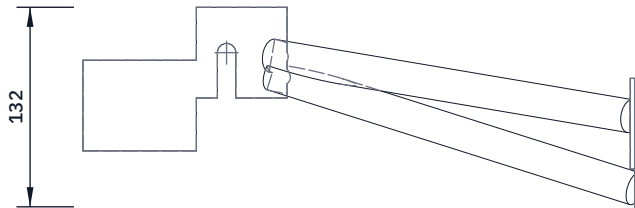

FRONT VIEW
Scale 1:5; looking at the front (along +Y)



RIGHT VIEW
Scale 1:5; looking at the right side (along -X)



WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Dropouts: two 60 x 60 mm pieces of 6 mm plate. Slot each from the bottom edge: 12.2 mm wide, round end 30 mm up (the axle centre).

The left one carries a caliper tab 75 x 60 mm on its rear edge.

Set them 135 mm apart inside (motor axle width) on a dummy axle.

Upper stays (2): 22 x 1.6 tube about 290 mm, from the rail end cap (centred 35 mm up the cap) to the dropout's front edge, 2 mm below the axle line.

Lower stays (2): about 282 mm, from the rear cross member's rear face (35 mm in from the rail's outer face, 13 mm up) to the dropout, 14 mm below the axle line.

Each stay's dropout end is slotted 6 mm to take the plate; trim any tube inside the plate's inner face so the hub fits.

Caliper tab: drill the two post-mount holes with the caliper and rotor in place (step 12), 74 mm apart, 6.5 mm.

STEPGEN

github.com/BoujeeEnjinia1701/stepgen

StepGen rear stays and dropouts (left side shown): making sketch

DRAWING NO. SGN-DWG-104			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Steel tube 22 x 1.6 mm; dropouts 6 mm steel plate					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	