



CONCEPT, NOT FOR FABRICATION


REV	DESCRIPTION	DATE	BY
P1	Preliminary GA for TRL 3 (SGN-CAL-001), SwapCell v0.3	2026-09-25	AC
P2	Deck rails 60 x 30 x 2 (SGN-DDR-002)	2026-09-25	AC

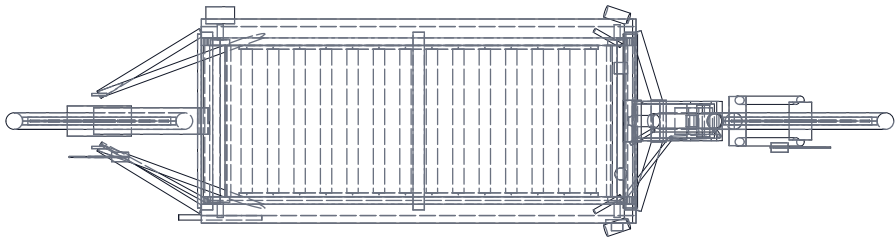


TOP VIEW
Scale 1:20

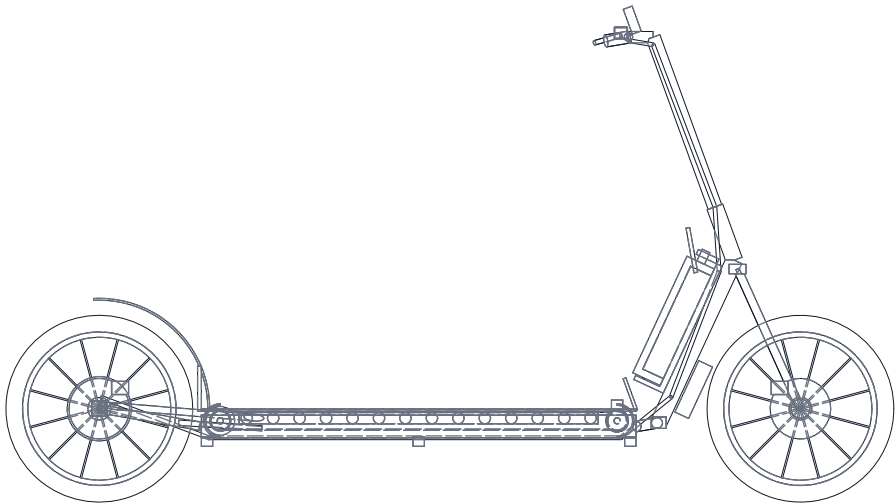

FRONT VIEW
Scale 1:20

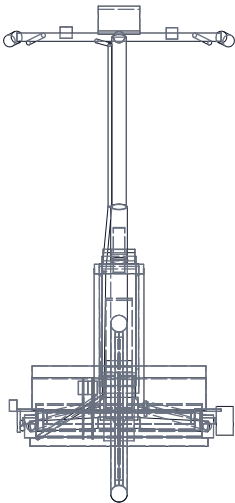

RIGHT VIEW
Scale 1:20

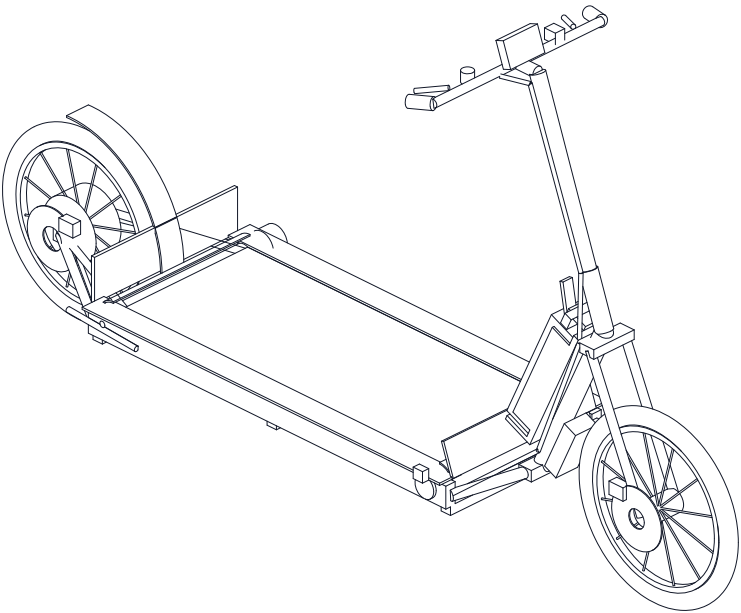

ISOMETRIC VIEW
Not to scale

KEY DIMENSIONS (MM) AND INTERFACES

Overall 2349 long x 612 wide (grips) x 1312 high
Wheelbase 1855; 20 in (ETRT0 406) wheels, tire OD 494
Head angle 70 deg, fork offset 30, trail 58
Belt 400 wide; end rollers 1050 apart, usable 1000
Belt top 240 above ground; ground clearance 148
Bar 1230 above ground (990 above belt)
Lean clearance 30 deg (clutch housing)
Deck rails 60 x 30 x 2 RHS; column 38 x 2; down tube 44 x 2
SwapCell v0.3 receiver, latch class V1 on down tube:
preload 330 N via over-centre lever with detent,
10 kOhm INTERLOCK coding resistor in series with key
Mass about 35 kg without pack, 37.9 kg with pack
PRELIMINARY, NOT FOR FABRICATION

STEPGEN

General arrangement, walking-treadmill vehicle

DRAWING NO. SGN-DWG-001			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-09-25		DRAWN Amish Chadha
MATERIAL / NOTES Frame: welded mild steel (S235 class) RHS and tube; guards 1 mm Al or HDPE. See bom/bom.csv					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand