


PRELIMINARY, NOT FOR FABRICATION


StillStack · github.com/BoujeeEnjinia1701/stillstack

REV	DESCRIPTION	DATE	BY
P1	Preliminary general arrangement (TRL 3)	2026-09-25	AC
P2	Rail and liner materials, stagnation cover (DDR-002)	2026-09-25	AC
P3	Constructable design: base ring, trim, tongues, stand (DDR-003)	2026-10-01	AC

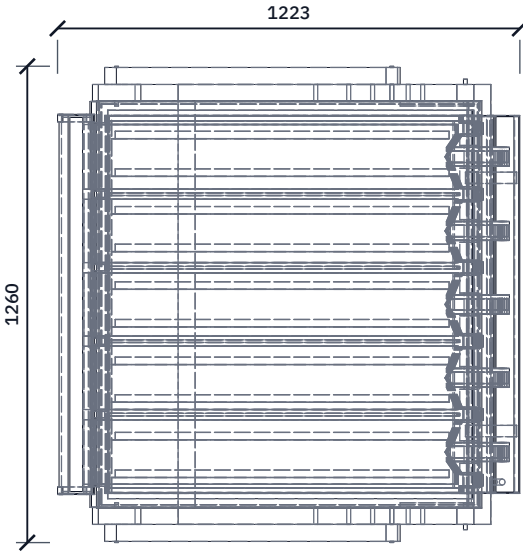


TOP VIEW

Scale 1:20; looking down (along -Z)

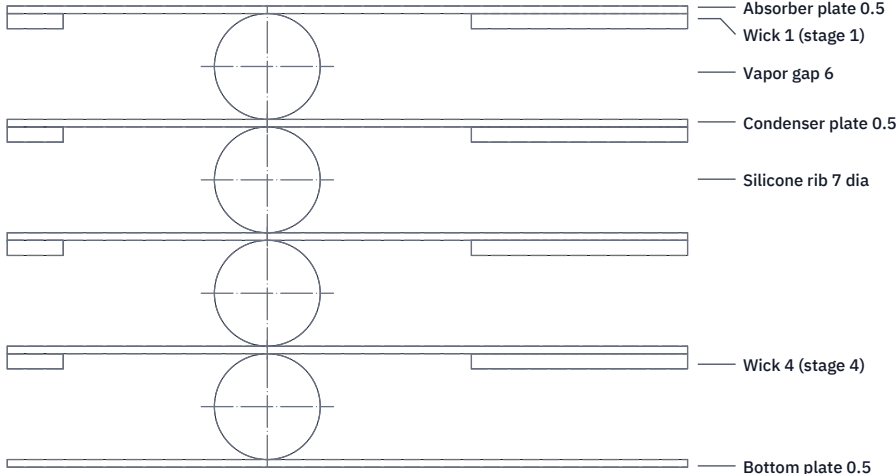


DETAIL A: STACK SECTION AT A RIB

Scale 2:1, looking up the slope

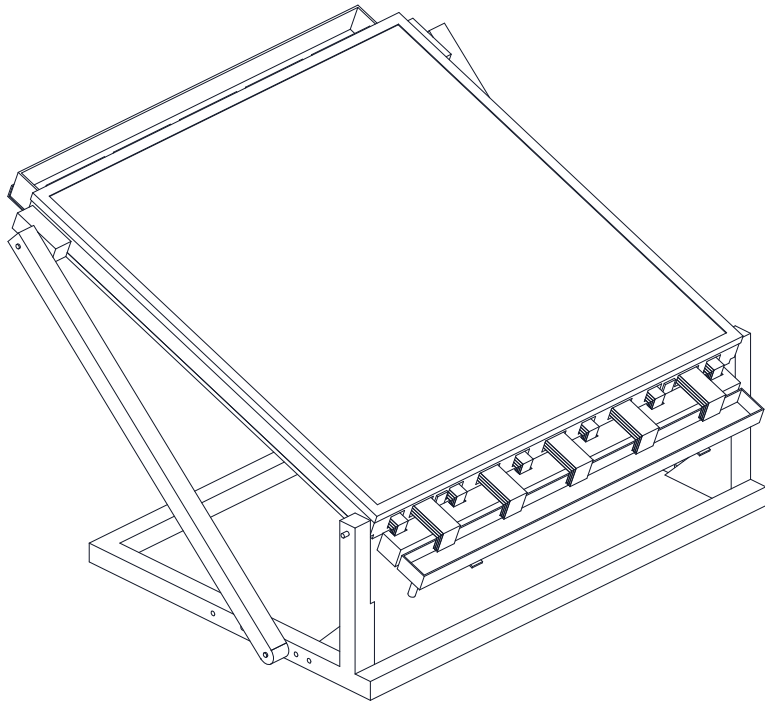


ISOMETRIC VIEW

Not to scale; seen from the front right and above, about 30 deg elevation

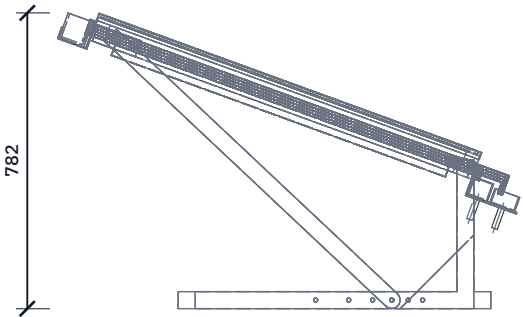


FRONT VIEW (SIDE ELEVATION)

Scale 1:20; looking at the front (along +Y)

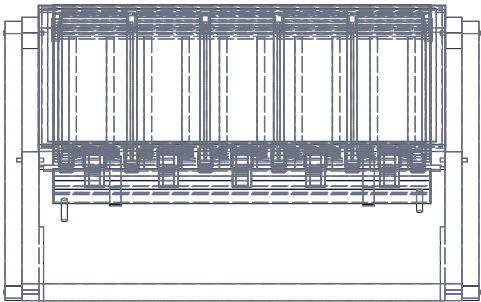

RIGHT VIEW (FROM LOW EDGE)

Scale 1:20; looking at the right side (along -X)

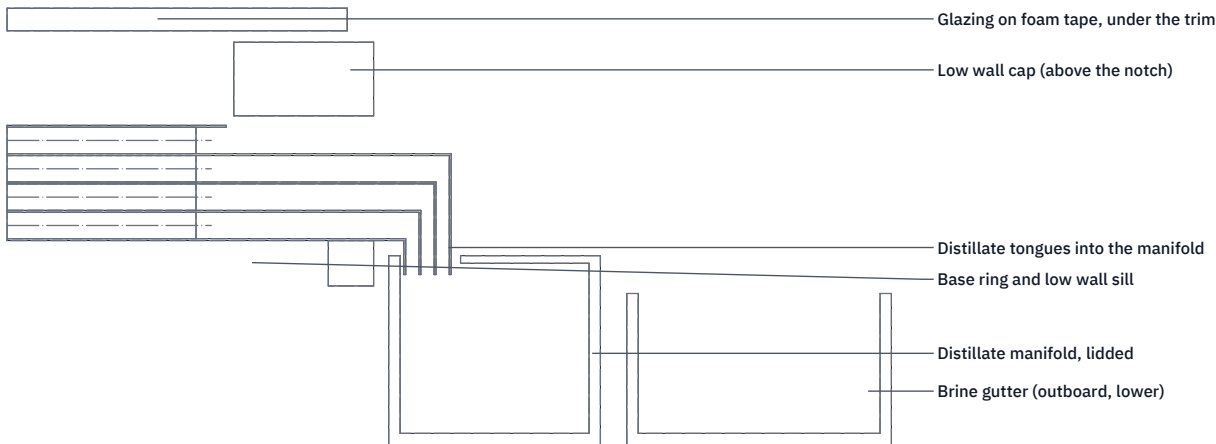

DETAIL B: LOW EDGE, DISTILLATE AND BRINE

Scale 1:2, untilted; cut on a rib line

KEY DIMENSIONS AND FIGURES (SSK-CAL-001)

Aperture 1.0 x 1.0 m; tilt 20 deg, stand 10 to 35 deg
4 stages; 6 mm vapor gap; 1 mm wicks; 0.5 mm plates
Rails: 4 per gap at 194 mm pitch; sag 0.5 mm
Dry breaks 10 mm each side of ribs and rails
Air gap 25 mm; 6 mm twin-wall PC glazing
Frame 12 mm plywood + 25 mm stone wool; 1,074 mm square outside
Front pivot bolts; props pinned at 6 holes
Design day: about 10.6 L/day, GOR about 1.3
Dry stagnation: stage 1 about 140 C (144 C calm)
Stages 1, 2 rated 150 C; cover (BOM 14) not shown
Panel about 18.5 kg dry, 22.5 kg wet
Fasteners not shown; see build plan SSK-BLD-001

STILLSTACK

github.com/BoujeeEnjinia1701/stillstack

General arrangement

DRAWING NO. SSK-DWG-002		REV P3	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-10-01	DRAWN Amish Chadha
MATERIAL / NOTES See bom/bom.csv. Plates 0.5 mm aluminum; rails 150 C polymer (stages 1, 2) and PC; ribs silicone; frame plywood, stone wool				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	