



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW
Scale 1:2; looking down (along -Z)



FRONT VIEW
Scale 1:2; looking at the front (along +Y)



RIGHT VIEW
Scale 1:2; looking at the right side (along -X)

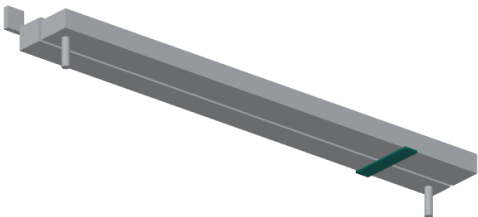

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 240 mm of 30 x 4 mm flat bar per bracket.

Bend 90 deg (in a vice, over a 4 mm radius) so the upright leg is 88 mm and the outward leg is 143 mm, outside sizes.

Upright leg: three 4.5 mm holes, 6, 22 and 36 mm down from its top (into a tooth of the low wall comb and its sill).

Fit: at 335 mm each side of the centre line, on a tooth.

The manifold sits on the outward leg against the upright; the brine gutter sits on its outer end, 7 mm further out.

Use stainless 4 x 25 mm screws.

Check: the outward leg is square to the wall; both brackets at the same height within 1 mm (the manifold must not tip).

STILLSTACK			github.com/BoujeeEnjinia1701/stillstack		
StillStack outlet bracket (make 2): making sketch					
DRAWING NO. SSK-DWG-115			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium flat bar 30 x 4 mm, 6063					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand		