

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW
Scale 1:10; looking down (along -Z)



FRONT VIEW
Scale 1:10; looking at the front (along +Y)



RIGHT VIEW
Scale 1:10; looking at the right side (along -X)

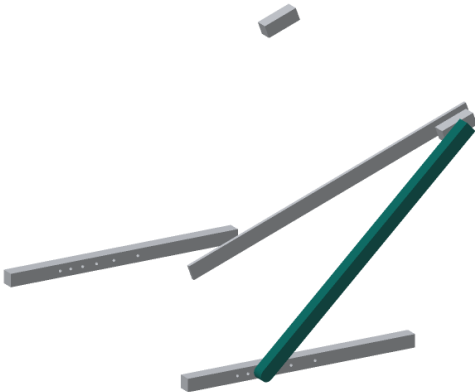

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut two lengths of 1044 mm; edges eased. Square the top end; round the foot end to a 22 mm radius about its hole (clears the ground).

Two 10.5 mm holes through the side, 22 mm from each end: 1000 mm between centres. Drill both props clamped together.

Top: an M10 x 120 stainless bolt through the prop, the prop block and the side wall (nut and washer inside the wall).

Foot: lies against the outside face of the ground rail; an M10 x 100 stainless bolt with a wing nut through the prop and the rail hole for the tilt you want (the stand pins).

To change the tilt: support the panel, pull both foot pins, swing the props to the new holes, refit the pins.

Check: hole centres 1,000 mm apart within 1 mm.

STILLSTACK

github.com/BoujeeEnjinia1701/stillstack

StillStack prop (make 2): making sketch

DRAWING NO. SSK-DWG-118			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES 45 x 45 mm treated timber					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand