BUILD PLAN SKETCH, PLAN NOT YET BUILT

StillStack · github.com/BoujeeEnjinia1701/stillstack

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

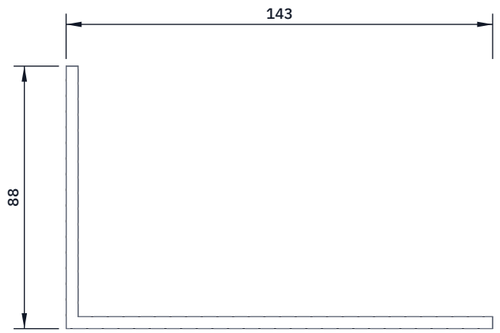

TOP VIEW

Scale 1:2; looking down (along -Z)



FRONT VIEW

Scale 1:2; looking at the front (along +Y)

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

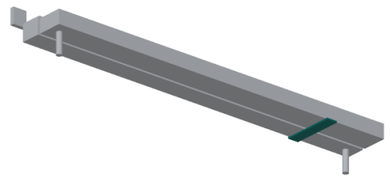

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 240 mm of 30 x 4 mm flat bar per bracket.
Bend 90 deg (in a vice, over a 4 mm radius) so the upright leg
is 88 mm and the outward leg is 143 mm, outside sizes.
Upright leg: three 4.5 mm holes, 6, 22 and 36 mm down from its top
(into a tooth of the low wall comb and its sill).
Fit: at 335 mm each side of the centre line, on a tooth.
The manifold sits on the outward leg against the upright; the
brine gutter sits on its outer end, 7 mm further out.
Use stainless 4 x 25 mm screws.
Check: the outward leg is square to the wall; both brackets at
the same height within 1 mm (the manifold must not tip).

STILLSTACK

github.com/BoujeeEnjinia1701/stillstack

StillStack outlet bracket (make 2): making sketch

DRAWING NO.	REV	SHEET	SIZE
SSK-DWG-115	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:2	mm		2026-10-02	Amish Chadha

MATERIAL / NOTES

Aluminium flat bar 30 x 4 mm, 6063

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand