REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	Pivot bolt M10 x 75; gusset drilled at the 10 and 15 deg holes (SSK-DEC-001 D-02)	2026-10-24	AC

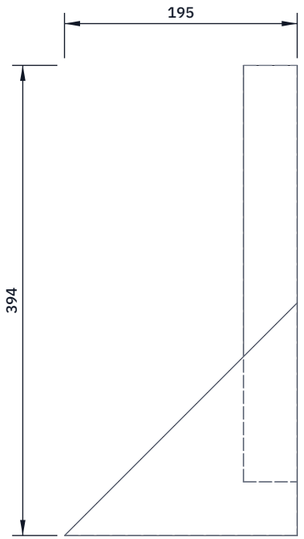

TOP VIEW

Scale 1:5; looking down (along -Z)

FRONT VIEW

Scale 1:5; looking at the front (along +Y)

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

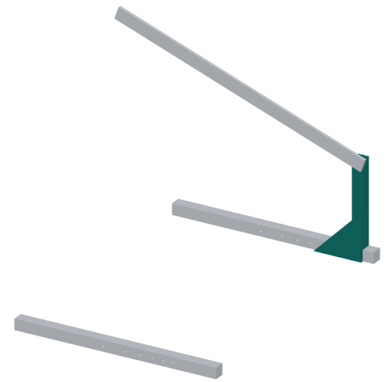

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Post: 45 x 45 mm, 349 mm long, ends square.
Pivot hole 10.5 mm, 22 mm down from the top, through the side that faces the panel.
Gusset: a right triangle of 12 mm plywood, legs 195 mm.
Fit: the post stands on top of the ground rail at its post mark; the gusset is glued and screwed (8 x 4 x 40 mm) to the inside faces of both, behind the post, making the joint rigid.
The post's inside face touches the side wall; the pivot bolt (M10 x 75 stainless) goes through post and wall, nut and large washer inside the wall, in the liner pocket.
Drill 10.5 mm through the gusset at the 10 and 15 deg prop holes of the rail, which lie under it (foot pin M10 x 120).
Check: the post is upright (spirit level) on a level rail.

STILLSTACK github.com/BoujeeEnjinia1701/stillstack

StillStack front post and gusset (make 2 of each): making sketch

DRAWING NO.	REV	SHEET	SIZE
SSK-DWG-117	P2	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:5	mm		2026-10-02	Amish Chadha

MATERIAL / NOTES
45 x 45 mm treated timber; gusset 12 mm exterior plywood

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand