


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

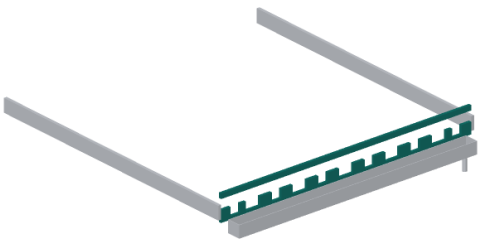

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Comb: strip 1,050 x 45 mm. Cap: strip 1,050 x 19.5 mm.

(The views show the cap lifted 40 mm above the comb.)

Eleven notches cut down from the comb's top edge, 33 mm deep,

leaving a 12 mm sill along the bottom. From the centre line:

40 mm wide (distillate tongues) at 97.2, 291.6, 465 each side;

60 mm wide (brine tongues) at 0 and 194.4, 390.6 each side.

Saw the notch sides, chop out with a chisel, file square.

Fit: the comb sits between the side walls, its sill on the same


level as the base ring (inside it). The cap sits on the teeth,

held by two 4 x 30 mm screws into the side walls' end grain.

Each plate drops in from above with its tongues in the notches;

the cap closes the notches above the stack.

Check: every notch 33 mm deep; the cap sits flat on all teeth.

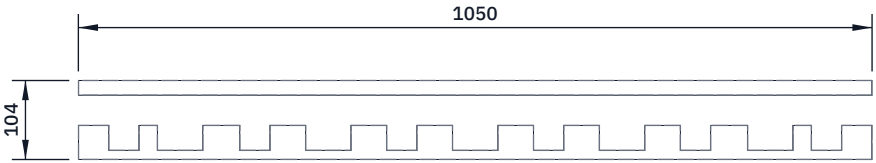

TOP VIEW

Scale 1:10; looking down (along -Z)



FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

STILLSTACK

github.com/BoujeeEnjinia1701/stillstack

StillStack low wall comb and cap (outlet end): making sketch

DRAWING NO.

SSK-DWG-103

REV

P1

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:10

UNITS

mm

PROJECTION



DATE

2026-10-02

DRAWN

Amish Chadha

MATERIAL / NOTES

Exterior plywood 12 mm