


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-02	AC

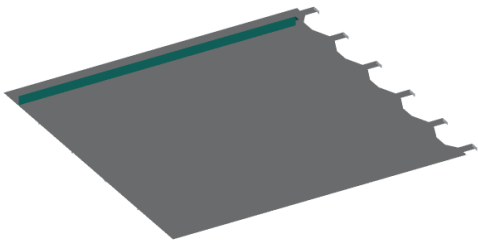

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS


Cut ten strips 50 x 940 mm.

Fold each 90 deg along its length, 20 mm from one edge, between two hardwood battens clamped in a vice: a 20 mm flange and a 30 mm web.

Bond the flange under the bottom plate with high-temperature silicone adhesive, web hanging down, running down the slope.

Pitch 99.6 mm; first fin 49.8 mm in from the side edge; ends 28 mm in from the plate's high edge and clear of the low edge zigzag.

Check: each fin square to the plate within 5 deg; adhesive along the whole flange.



TOP VIEW

Scale 1:5; looking down (along -Z)



FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

STILLSTACK

github.com/BoujeeEnjinia1701/stillstack

StillStack heat-rejection fin (make 10): making sketch

DRAWING NO. SSK-DWG-108			REV P1		SHEET 1 of 1		SIZE ANSI B	
SCALE 1:5		UNITS mm	PROJECTION 		DATE 2026-10-02		DRAWN Amish Chadha	
MATERIAL / NOTES Aluminium flashing or sheet 0.5 mm								
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com								
Generated from cad/src; do not edit by hand								