



CONCEPT, NOT FOR FABRICATION

StumpRider · github.com/BoujeeEnjinia1701/stump rider

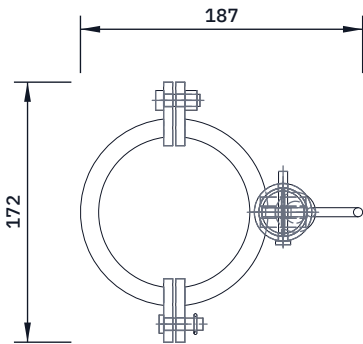


TOP VIEW

Scale 1:5; looking down (along -Z)

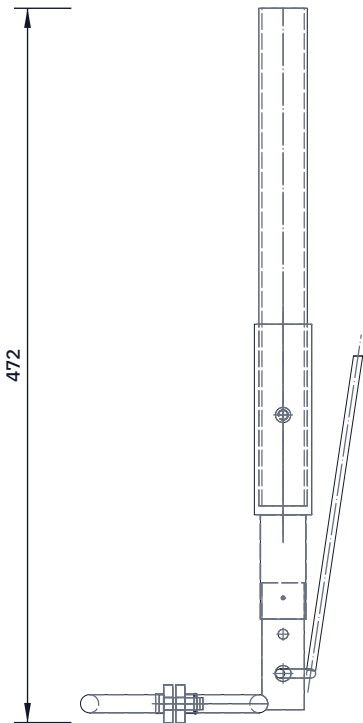

FRONT VIEW

Scale 1:5; looking at the front (along +Y)

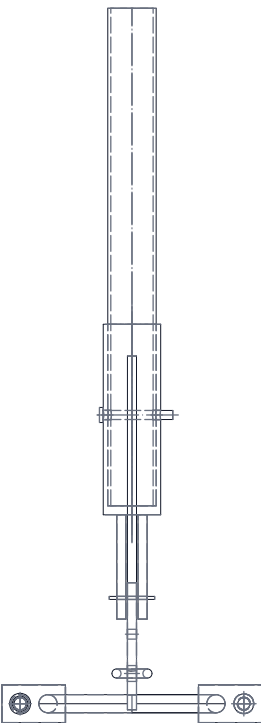

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)


REV	DESCRIPTION	DATE	BY
P1	Preliminary GA for TRL 3 (from cad/src/model.py)	2026-10-03	AC
P2	SMR-DDR-002: design for construction	2026-10-03	AC
P3	SMR-DDR-003: hook head detail; bamboo variant note	2026-10-03	AC



WHOLE TOOL, ASSEMBLED

Scale 1:40; side elevation looking along +Y, ring on the left

4498

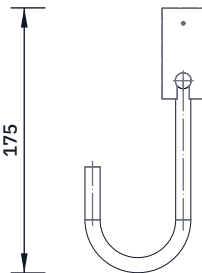

DETAIL B: HOOK HEAD

Scale 1:5; front view (along +Y)

Pins into the pole head's fork in place of the ring, same shear pin

MAIN SIZES (MM UNLESS STATED)

Rider ring: 12 bar, 100 inside, 124 outside

Two halves, 2 gap at each joint; hinge M8 (+Y), gate pin 8 (-Y)

Tang 6 x 28 x 84 on the fixed half; holes 10.5 (tether),

6.5 (jigging weight) and 2.1 (shear pin), 20, 46, 70 up

Pole head: tube 38 x 3 x 120 on a 6 end plate; fork

cheeks 6 x 30, 8 apart; tang top 45 below the plate

Shear pin: 2.0 soft aluminium wire, 30 long, ends bent

Pole: three 1,450 sections, 32 x 2 aluminium; sleeves

38 x 2.8 x 200, two rivets below and a 6 pin above

Top hand to ring 4,181; packed 1,550

Pin rating 302 N nominal, 256 to 347 N band

Hook head: 6 x 28 x 60 flat, holes 10.5 and 2.1; 10 bar J,

R30 bend, 50 clear throat (SMR-DWG-111)

Bamboo local variant: 36 culms, ferrules 40 x 1.5 x 160 (DWG-112)

Third-angle; ring centre at the origin, pole on +X

STUMPRIDER

github.com/BoujeeEnjinia1701/stump rider

Canoe-worked gillnet release tool: general arrangement

DRAWING NO. SMR-DWG-001			REV P3	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES Kit per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand