




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

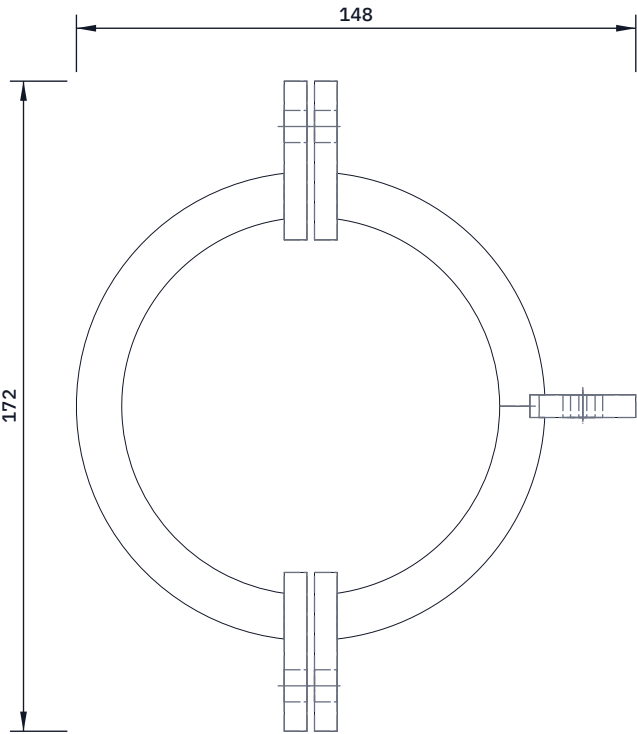


TOP VIEW
Scale 1:2; looking down (along -Z)

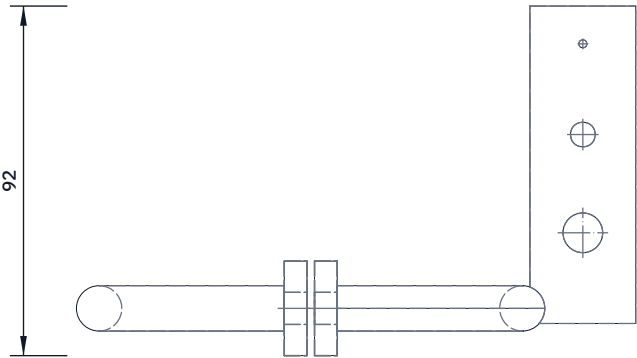

FRONT VIEW
Scale 1:2; looking at the front (along +Y)

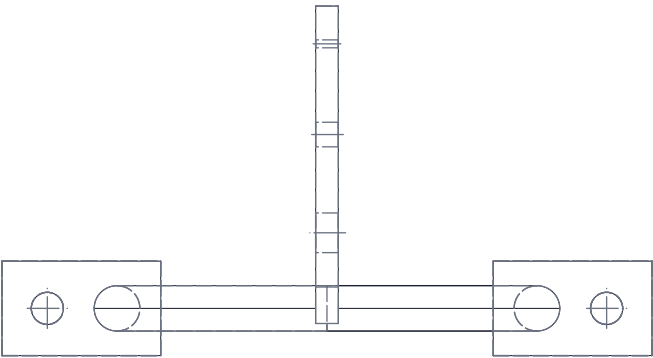

RIGHT VIEW
Scale 1:2; looking at the right side (along -X)

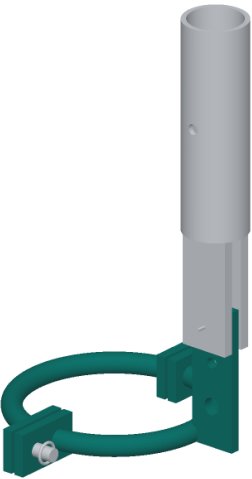

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Bend 12 bar round a 100 mm former into a full ring, 112 mean diameter; saw across it to make two halves with a 2 mm gap at each joint.

Ears: four 6 x 25 x 42 flat bar, 8.5 hole 18 out from the bar centre; weld one to each end, holes in line.

Tang: 6 x 28 x 84 flat bar, welded on the outside of the fixed half midway between the joints, 4 below its top.

Tang holes 10.5, 6.5 and 2.1 at 20, 46 and 70 up, 14 from the inner edge. Galvanise after welding.

Check: halves meet with 2 mm gaps, both holes line up.

STUMPRIDER

github.com/BoujeeEnjinia1701/stumprider

Rider ring, two halves with ears and tang

DRAWING NO. SMR-DWG-101			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 12 mm mild steel round bar; 6 mm flat bar					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand