



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC



TOP VIEW

Scale 2:1; looking down (along -Z)

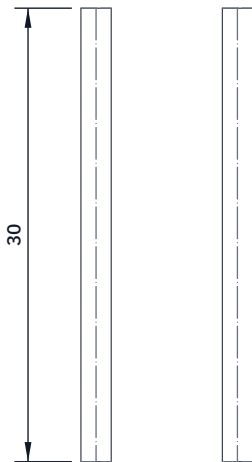

FRONT VIEW

Scale 2:1; looking at the front (along +Y)

RIGHT VIEW

Scale 2:1; looking at the right side (along -X)



WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 30 long from one reel of 2.0 soft aluminium wire;
file the ends square, no burr.

Never use steel wire, a nail or a bolt: the pin is
the safety device that limits the pull.

Before use, break ten pins from the reel on CalRig
in a test fork: all must break 256 to 347 N.

Fit: push through cheek, tang and cheek; bend both
ends over by hand to about 45 deg.

Keep eleven spares in the spare pin tube.

STUMPRIDER

github.com/BoujeeEnjinia1701/stumprider

Shear pin (12, one fitted)

DRAWING NO. SMR-DWG-103			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 2.0 mm soft aluminium wire, 1050 or 1100, O temper					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand