



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

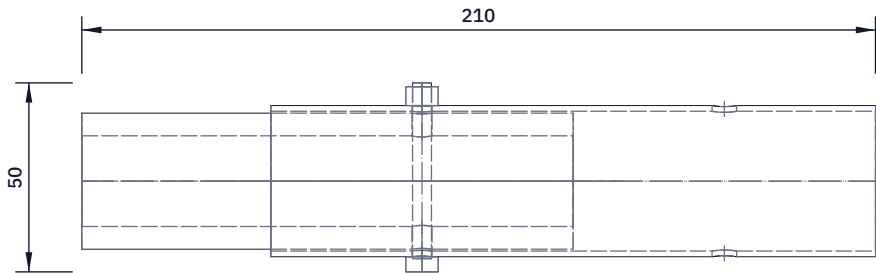


TOP VIEW

Scale 1:2; looking down (along -Z)

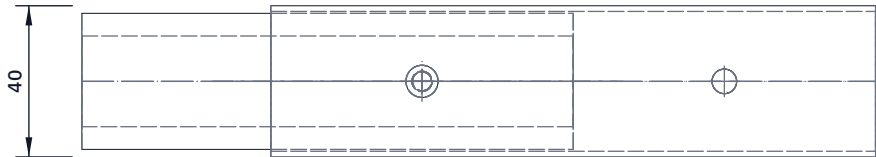


FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

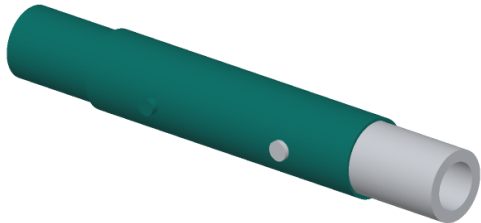

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Culms: three straight 1,450 lengths, 34 to 38 outside; top one cut just above a node. Soak in borax and boric acid; whip each end with wire. Accept a culm only if 5 kg hung at the middle of a 1.4 m span sags 2.9 or less. Bottom culm: dress the bottom 120 to 31.8 for the pole head; 6.5 hole 60 up. Ferrules: 160 of 40 x 1.5 tube; 5.3 hole 40 and 6.5 hole 120 from one end. Set on the lower culm in epoxy with an M5 bolt; next culm slides in, 6 mm lock pin.

STUMPRIDER				github.com/BoujeeEnjinia1701/stumprider			
Bamboo local variant: culms and ferrule joint							
DRAWING NO. SMR-DWG-112			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 		DATE 2026-10-03		DRAWN Amish Chadha	
MATERIAL / NOTES Treated bamboo culm 36 mm; steel tube 40 x 1.5							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand			