CONCEPT, NOT FOR FABRICATION

StumpRider · github.com/BoujeeEnjinia1701/stumprider



TOP VIEW

Scale 1:5; looking down (along -Z)

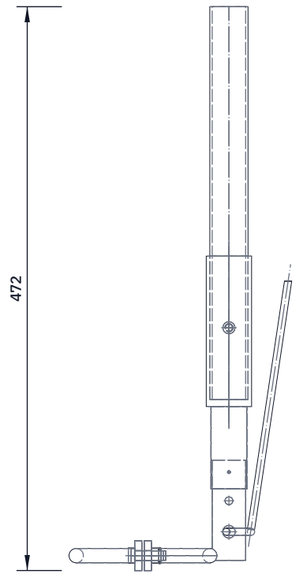

FRONT VIEW

Scale 1:5; looking at the front (along +Y)

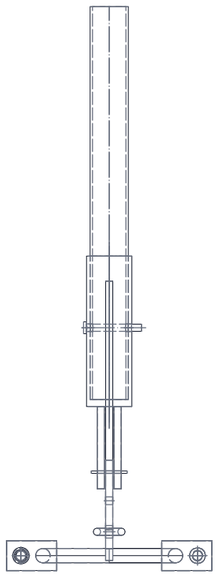

RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA for TRL 3 (from cad/src/model.py)	2026-10-03	AC
P2	SMR-DDR-002: design for construction	2026-10-03	AC
P3	SMR-DDR-003: hook head detail; bamboo variant note	2026-10-03	AC
P4	SMR-DEC-001 F1: hook head J of 12 mm bar, butt welded	2026-10-24	AC

WHOLE TOOL, ASSEMBLED

Scale 1:40; side elevation looking along +Y, ring on the left



DETAIL B: HOOK HEAD

Scale 1:5; front view (along +Y)

Pins into the pole head's fork in place of the ring, same shear pin

MAIN SIZES (MM UNLESS STATED)

Rider ring: 12 bar, 100 inside, 124 outside
Two halves, 2 gap at each joint; hinge M8 (+Y), gate pin 8 (-Y)
Tang 6 x 28 x 84 on the fixed half; holes 10.5 (tether),
6.5 (jigging weight) and 2.1 (shear pin), 20, 46, 70 up
Pole head: tube 38 x 3 x 120 on a 6 end plate; fork
cheeks 6 x 30, 8 apart; tang top 45 below the plate
Shear pin: 2.0 soft aluminium wire, 30 long, ends bent
Pole: three 1,450 sections, 32 x 2 aluminium; sleeves
38 x 2.8 x 200, two rivets below and a 6 pin above
Top hand to ring 4,181; packed 1,550
Pin rating 302 N nominal, 256 to 347 N band
Hook head: 6 x 28 x 60 flat, holes 10.5 and 2.1; 12 bar J,
R30 bend, 48 clear throat (SMR-DWG-111; DEC F1)
Bamboo local variant: 36 culms, ferrules 40 x 1.5 x 160 (DWG-112)
Third-angle; ring centre at the origin, pole on +X

STUMPRIDER

github.com/BoujeeEnjinia1701/stumprider

Canoe-worked gillnet release tool: general arrangement

DRAWING NO.	REV	SHEET	SIZE
SMR-DWG-001	P4	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:5	mm		2026-10-24	Amish Chadha

MATERIAL / NOTES

Kit per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand