REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

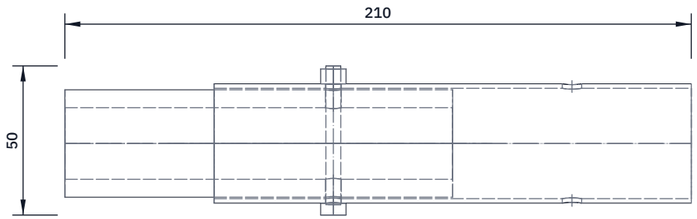

TOP VIEW

Scale 1:2; looking down (along -Z)

FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

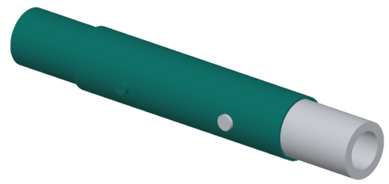

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Culms: three straight 1,450 lengths, 34 to 38 outside; top one cut just above a node. Soak in borax and boric acid; whip each end with wire. Accept a culm only if 5 kg hung at the middle of a 1.4 m span sags 2.9 or less.

Bottom culm: dress the bottom 120 to 31.8 for the pole head; 6.5 hole 60 up. Ferrules: 160 of 40 x 1.5 tube; 5.3 hole 40 and 6.5 hole 120 from one end. Set on the lower culm in epoxy with an M5 bolt; next culm slides in, 6 mm lock pin.

STUMPRIDER github.com/BoujeeEnjinia1701/stumprider

Bamboo local variant: culms and ferrule joint

DRAWING NO.	REV	SHEET	SIZE
SMR-DWG-112	P1	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:2	mm		2026-10-03	Amish Chadha

MATERIAL / NOTES

Treated bamboo culm 36 mm; steel tube 40 x 1.5

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand