



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC




TOP VIEW

Scale 1:2; looking down (along -Z)

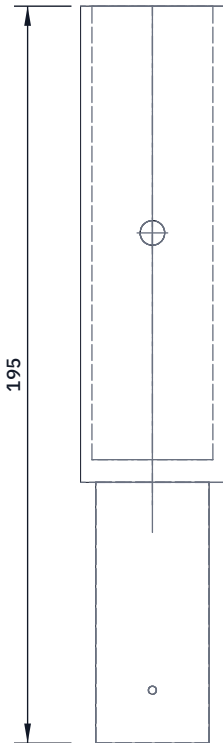

FRONT VIEW

Scale 1:2; looking at the front (along +Y)

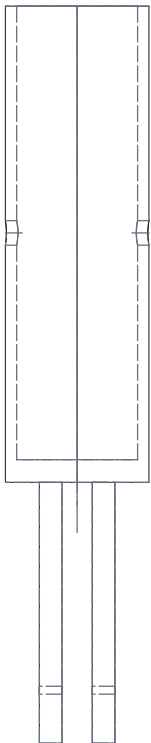

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)



WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

- Socket: 38 x 3 steel tube, 120 long, ends square.
- End plate: 38 disc of 6 plate, welded across one end.
- Cheeks: two 6 x 30 x 69 flat bar, welded under the plate, centred, 8 apart inside (use an 8 spacer while welding).
- Drill the 2.1 shear pin hole through both cheeks together, 55 below the plate.
- Drill 6.5 across the socket 60 above the plate.
- Galvanise; paint the pin rating on the socket.
- Check: the tang slides between the cheeks freely.

STUMPRIDER

github.com/BoujeeEnjinia1701/stump rider

Pole head (socket, end plate and fork)

DRAWING NO. SMR-DWG-102			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES 38 x 3 steel tube; 6 mm plate and flat bar					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand