




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

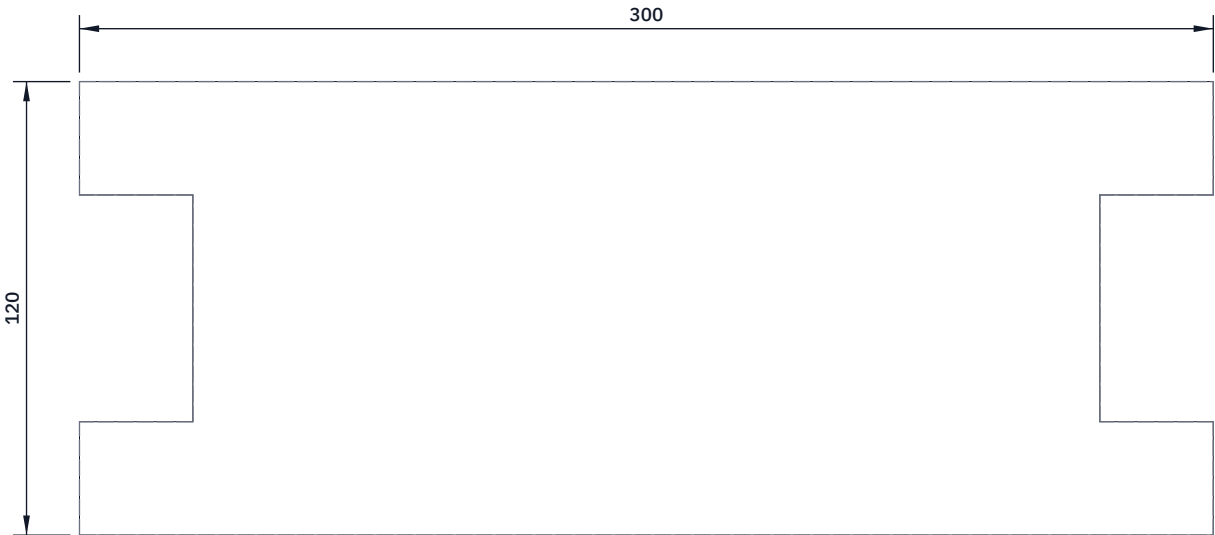


TOP VIEW
Scale 1:2; looking down (along -Z)

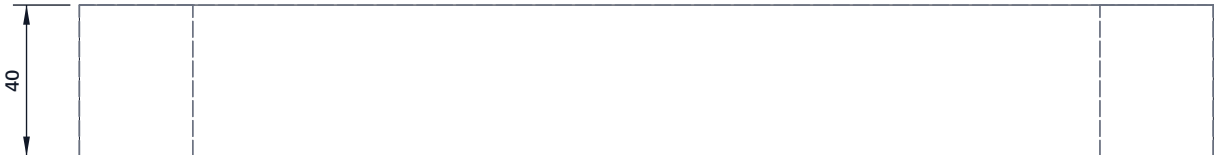

FRONT VIEW
Scale 1:2; looking at the front (along +Y)

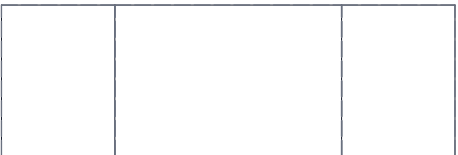

RIGHT VIEW
Scale 1:2; looking at the right side (along -X)

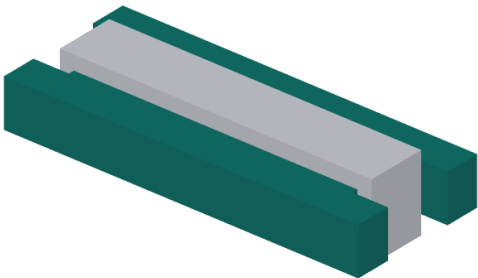

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 300 x 120 from 40 closed-cell foam (net float or packaging foam; not polystyrene).

Cut a 30 deep, 60 wide notch in each end.

Round the corners; paint orange.

Tie the cord's free end through a 6 hole near one notch and wind the 10 m lengthwise in the notches.

Floats the ring and cord with 2 times reserve; not the jiggling weight.

Check: floats with the ring hung on it.

Float winder

DRAWING NO. SMR-DWG-106	REV P1	SHEET 1 of 1	SIZE ANSI B
----------------------------	-----------	-----------------	----------------

SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-03	DRAWN Amish Chadha
--------------	-------------	----------------	--------------------	-----------------------

MATERIAL / NOTES 40 mm closed-cell polyethylene foam
