


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:10; looking down (along -Z)

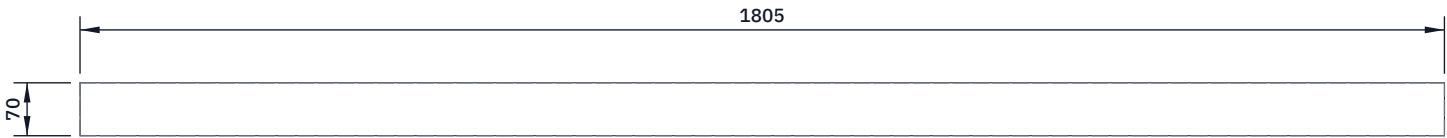


FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

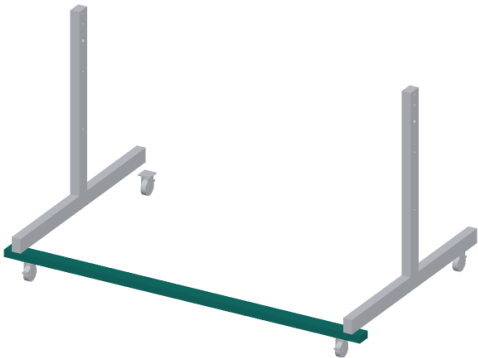

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make two. Cut 1,805 mm of 70 x 35 mm treated timber; square the ends.
Lay it flat (70 mm wide, 35 mm thick). It runs across the stand, front and back, under the ends of the side rails.
Crossing bolts: two 8.5 mm holes at each end: 50.5 mm from the end on the centre line, and 74.5 mm from the end, 20 mm toward the inside of the stand. Drill with the side rail clamped in place.
Castor holes: four 8.5 mm holes at each end on a 42 mm square, centred 112.5 mm in from the end and on the centre line.
Seal every cut end and hole with end-grain sealer.
Fit: a side rail sits across each end; a castor bolts underneath.
Check: the two rails are the same length within 2 mm.

SunClave cross rail (make 2): making sketch

DRAWING NO. SCL-DWG-101			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Treated timber 70 x 35 mm, laid flat					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	