


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW

Scale 1:1; looking down (along -Z)

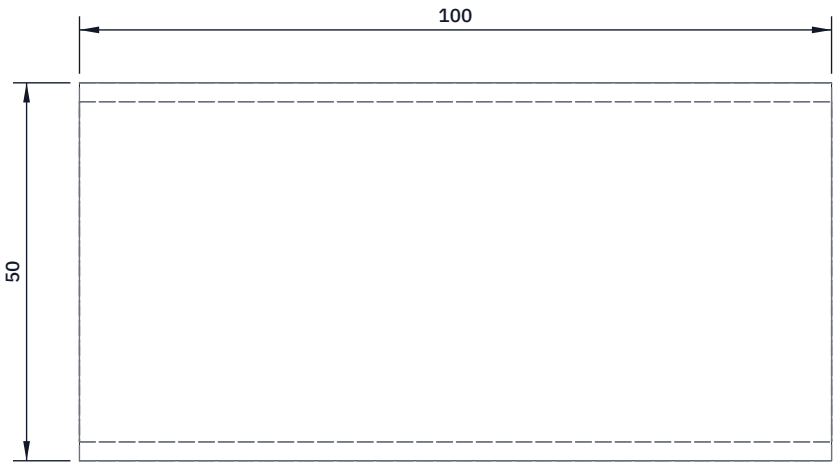


FRONT VIEW

Scale 1:1; looking at the front (along +Y)

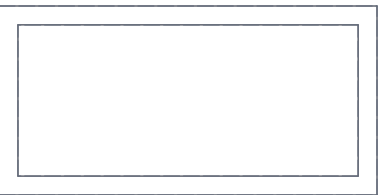

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

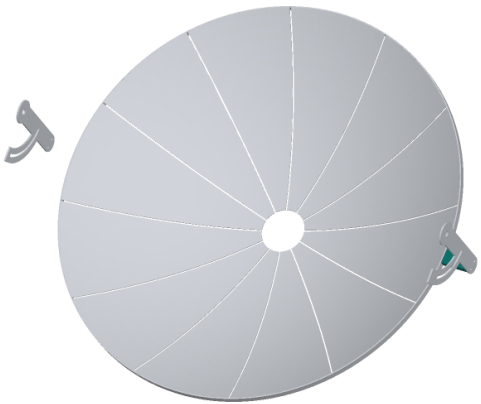

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make two. Cut 99.5 mm of 50 x 25 x 2.5 mm tube, ends square.

Nothing is drilled in the tube: the two M8 screws run along its inside, so it is a spacer clamped end to end.

File both ends flat and square so they bear on the rim band and on the yoke plate across their full face.

Fit: the 25 mm sides run with the rim band's height; two M8 countersunk screws 30 mm apart pass through the yoke plate, the tube and the rim band, nyloc nuts inside the band.

Check: the length of the two stand-offs matches within 0.5 mm.

SUNCLAVE

github.com/BoujeeEnjinia1701/sunclave

SunClave rim stand-off (make 2): making sketch

DRAWING NO. SCL-DWG-113			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Steel rectangular tube 50 x 25 x 2.5 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand