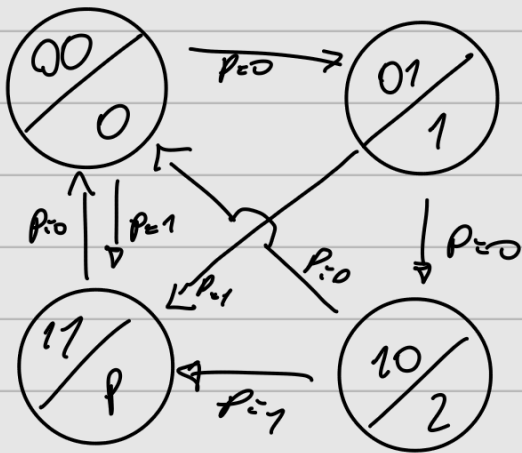


entradas			Salida	
X	EA1	EA0	PE1	PE0
0	0	0	0	1
0	0	1	1	0
0	1	0	0	0
0	1	1	0	0
1	0	0	1	1
1	0	1	1	1
1	1	0	1	1
1	1	1	1	1

		G	F	E	D	C	B	A
EA1	EA2	S6	SS	S4	S3	S2	S1	S0
0	0	0	1	1	1	1	1	1
0	1	0	0	0	0	1	1	0
1	0	1	0	1	1	0	1	1
1	1	1	1	1	0	0	1	1

entradas		Saida		
X	EA1	EA0	PE1	PE0
0	0	0	0	1
0	0	1	1	0
0	1	0	0	0
0	1	1	0	0
1	0	0	1	1
1	0	1	1	1
1	1	0	1	1
1	1	1	1	1

PE1

EA0 \ EA1	00	01	11	10
0	0 ₀	0 ₂	1 ₆	1 ₄
1	1 ₁	0 ₃	1 ₇	1 ₅

$$EA0 \cdot \bar{X} \cdot \overline{EA1} + X$$

PE0

EA0 \ EA1	00	01	11	10
0	1 ₀	0 ₂	1 ₆	1 ₄
1	0 ₁	0 ₃	1 ₇	1 ₅

$$\overline{EA0} \cdot \bar{X} \cdot \overline{EA1} + X$$

		G	F	E	D	C	B	A
EA1	EA0	S6	S5	S4	S3	S2	S1	S0
0	0	0	1	1	1	1	1	1
0	1	0	0	0	0	1	1	0
1	0	1	0	1	1	0	1	1
1	1	1	1	1	0	0	1	1

S_6

EA1 \ EA0	0	1
0	0 ₀	0 ₂
1	1 ₁	1 ₃

$$\begin{aligned} &\overline{EA0} \cdot \overline{EA1} \\ &\overline{EA0} \cdot EA1 \\ &EA1 \end{aligned}$$

S_1

EA1 \ EA0	0	1
0	1 ₀	1 ₂
1	1 ₁	1 ₃

$$S_1 = 1$$

S_5

EA1 \ EA0	0	1
0	1 ₀	0 ₂
1	0 ₁	1 ₃

$$S_5 = \overline{EA0} \cdot \overline{EA1} + EA0 \cdot EA1$$

S_4

EA1 \ EA0	0	1
0	1 ₀	0 ₂
1	1 ₁	1 ₃

$$\begin{aligned} &\overline{EA0} \cdot \overline{EA1} & \overline{EA0} \cdot EA1 \\ &\overline{EA0} \cdot EA1 & \overline{EA0} \cdot EA1 \\ &S_4 = \overline{EA0} + EA1 \end{aligned}$$

S_0

$$S_0 = S_4 = \overline{EA0} + EA1$$

S_3

		$E A 0$	
		0	1
$E A 1$	0	1 ₀	0 ₂
	1	1 ₁	0 ₃

$$\overline{E A 0} \cdot \overline{E A 1}$$

$$\overline{E A 0} \cdot \overline{E A 1}$$

$$S_3 = \overline{E A 0}$$

S_2

		$E A 0$	
		0	1
$E A 1$	0	1 ₀	1 ₂
	1	0 ₁	0 ₃

$$\overline{E A 0} \cdot \overline{E A 1}$$

$$\overline{E A 0} \cdot \overline{E A 1}$$

$$S_2 = \overline{E A 1}$$