



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



TOP VIEW

Scale 1:2; looking down (along -Z)

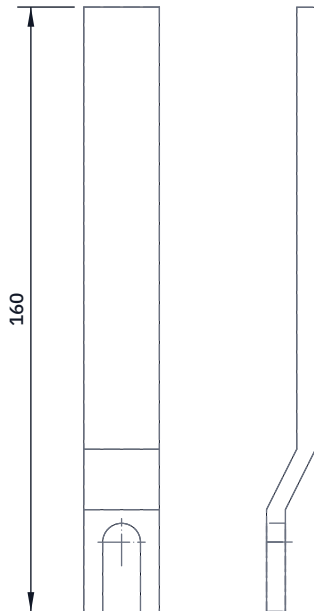


FRONT VIEW

Scale 1:2; looking at the front (along +Y)

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

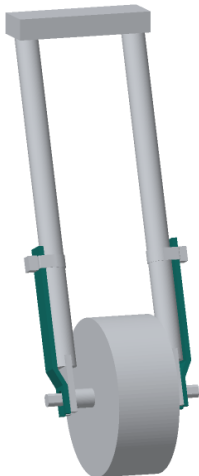

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make two, mirror images. Cut 160 mm lengths of 20 x 5 mm bar.

Axle slot at one end: 10.0 mm wide (a snug fit on the motor's 10 mm axle flats), open at the end, 23.4 mm deep, round-ended; the axle centre sits 15 mm in from the end.

Saw the sides, then file to a 10 mm gauge.

Joggle: two bends, 12 and 28 mm from the axle centre, so the long part sits 8 mm further out than the slotted end. Bend in a vice over a 5 mm packing, one arm left-hand, one right.

Round and deburr both ends; paint or zinc spray.

Fit: the slotted end lies flat on the outside of the dropout, under the axle washer and nut; the long part lies on the outside of the fork blade, held 130 mm up by a band clamp.

Check: no shake on the axle flats; the long part touches the blade.

SunSpoke torque arm (make 2, a left and a right): making sketch

DRAWING NO. SSP-DWG-107			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Steel flat bar 20 x 5 mm, S275 or mild steel					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand