

REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC




TOP VIEW
Scale 1:5; looking down (along -Z)



FRONT VIEW
Scale 1:5; looking at the front (along +Y)



RIGHT VIEW
Scale 1:5; looking at the right side (along -X)

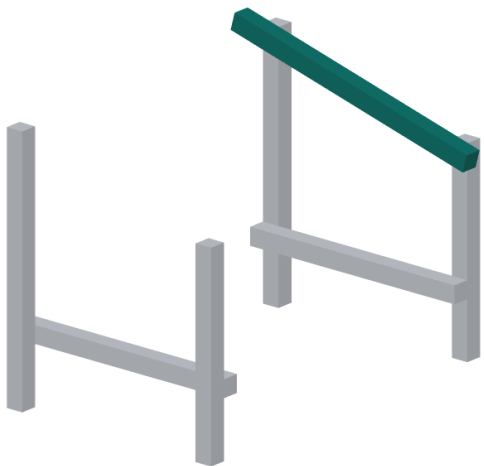

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make two. Cut 700 mm lengths of 45 x 45 mm treated timber.

Coach bolt holes: 9 mm through, side to side, 15 mm up from the rail's bottom face, 285 mm each side of the middle (one per leg).

Panel bolt holes: drill 6.5 mm down through the rail where the panel frame's own mounting holes fall (about 400 mm from the panel's centre line on each long side).

Fit: the panel's aluminium frame sits on the two rails; M6 bolts through the frame and rail, washers and nuts below.

The rails slope at 15 degrees, the panel tilt.

Check: the two rails are the same length and drilled alike.

SUNSPOKE

github.com/BoujeeEnjinia1701/sunspoke

SunSpoke panel stand top rail (make 2): making sketch

DRAWING NO. SSP-DWG-108			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Sawn timber 45 x 45 mm, treated					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	