
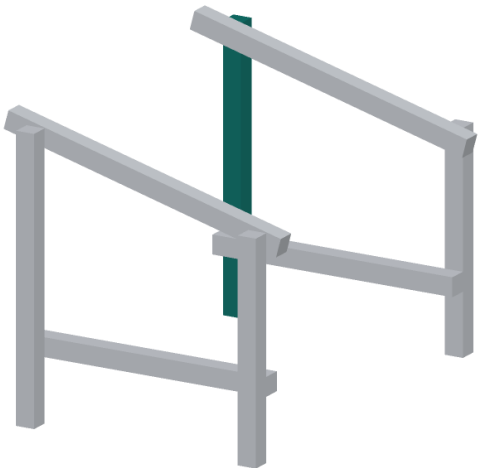
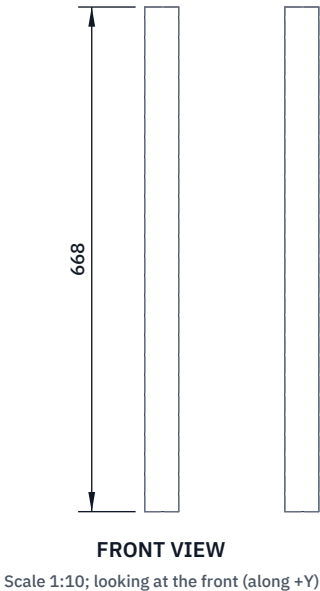


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC



WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Rear legs (drawn): cut two 668 mm long. Front legs: cut two 520 mm long. Square ends; seal the end grain.

Each leg: one 9 mm hole 17 mm below its top end for the coach bolt into the top rail; two 9 mm holes, one above the other, 162 and 183 mm up, for the low brace.

Fit: each leg lies against the outside face of the top rail and of the low brace, upright, its top just below the panel.

M8 x 100 coach bolts, washers and nuts inside: one at the rail, two at the brace, so each side frame is rigid.

Rear legs are the tall ones, on the high edge of the panel.

Check: each side frame lies flat and square when bolted.

SUNSPOKE

github.com/BoujeeEnjinia1701/sunspoke

SunSpoke panel stand legs (2 rear, 2 front): making sketch

DRAWING NO. SSP-DWG-109			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES Sawn timber 45 x 45 mm, treated					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	