



CONCEPT, NOT FOR FABRICATION


REV	DESCRIPTION	DATE	BY
P1	Preliminary GA, interface v0.3 (SWC-CAL-001)	2026-09-25	AC




TOP VIEW
Scale 1:5

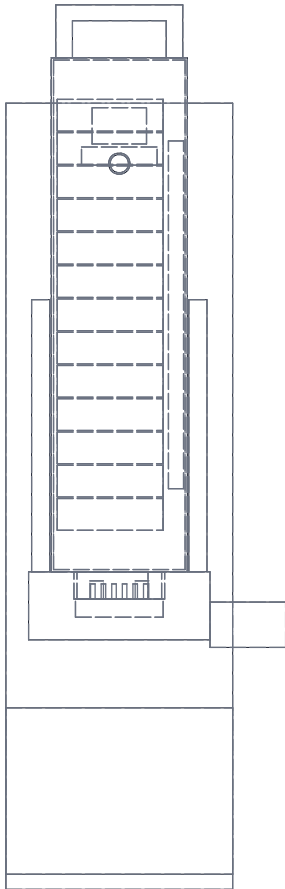

FRONT VIEW
Scale 1:5

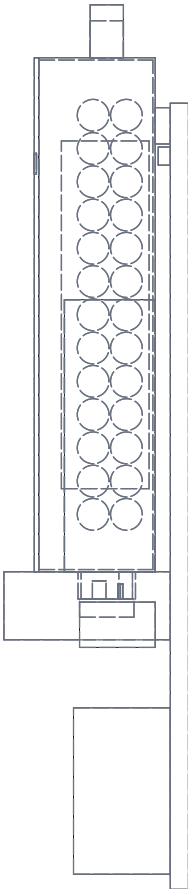

RIGHT VIEW
Scale 1:5

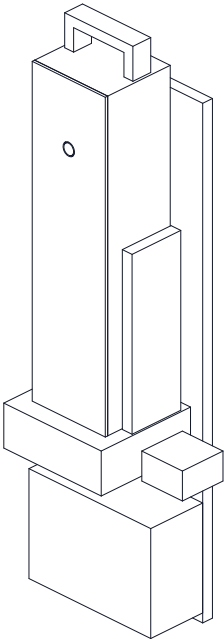

ISOMETRIC VIEW
Not to scale

INTERFACE V0.3 KEY DIMENSIONS (MM)

Pack body 340 x 90 x 80, tolerance +0 / -1.5
Overall length 393 (handle 35, plug 18)
Datum A: connector face; insertion along Z, connector first
Plug centred in width, 8 toward back face from depth centre
Guide faces 340 x 80, 90 apart; receiver clearance 1 per side
Latch pawl 36 wide, 45 below top end, back face
Handle zone 84 x 22, up to 35 above top end
Latch class V1: proof 1.72 kN along insertion axis
Vehicle receiver preload 330 N via over-centre lever
Contacts: P1 PACK+, P2 PACK-, S1 SGND, S2/S3 CAN,
S4 WAKE, S5 AUX, S6 INTERLOCK (10 kOhm coded)
Flush wake button on lid face (interface v0.3)
Pack mass about 2.85 kg; 13S2P, 46.8 V, 468 Wh
PRELIMINARY, NOT FOR FABRICATION

SWAPCELL

General arrangement, pack in wall dock

DRAWING NO. SWC-DWG-002			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-09-25		DRAWN Amish Chadha
MATERIAL / NOTES Pack: 1.5 mm 5052 Al tray, FR polymer lid; dock: Al plate, printed cradle. See bom/bom.csv					
Licensed CERN-OHL-S-2.0 · Open Hardware Portfolio · amishchadha.com					Generated from cad/src; do not edit by hand