



CONCEPT, NOT FOR FABRICATION

ThermaBrick · github.com/BoujeeEnjinia1701/thermabrick

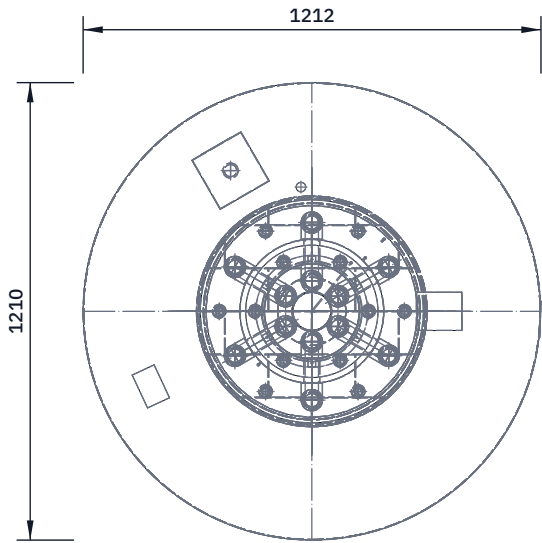


TOP VIEW

Scale 1:20; looking down (along -Z)

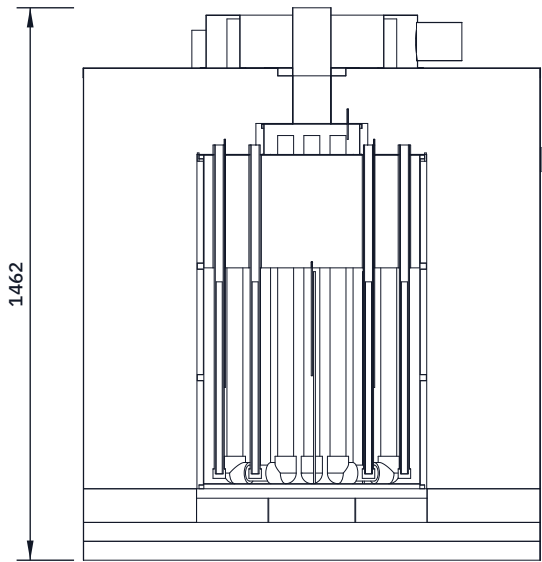


FRONT VIEW

Scale 1:20; looking at the front (along +Y)

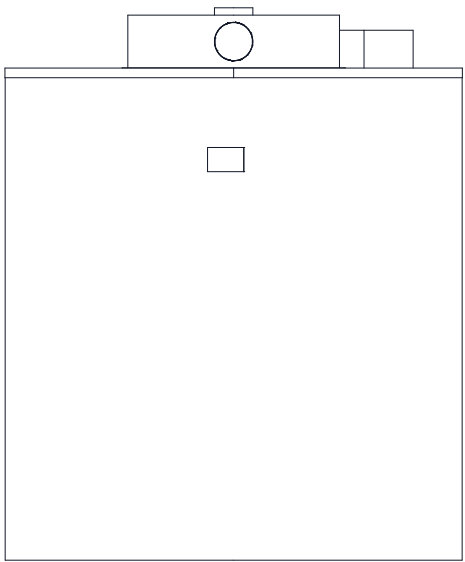

RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

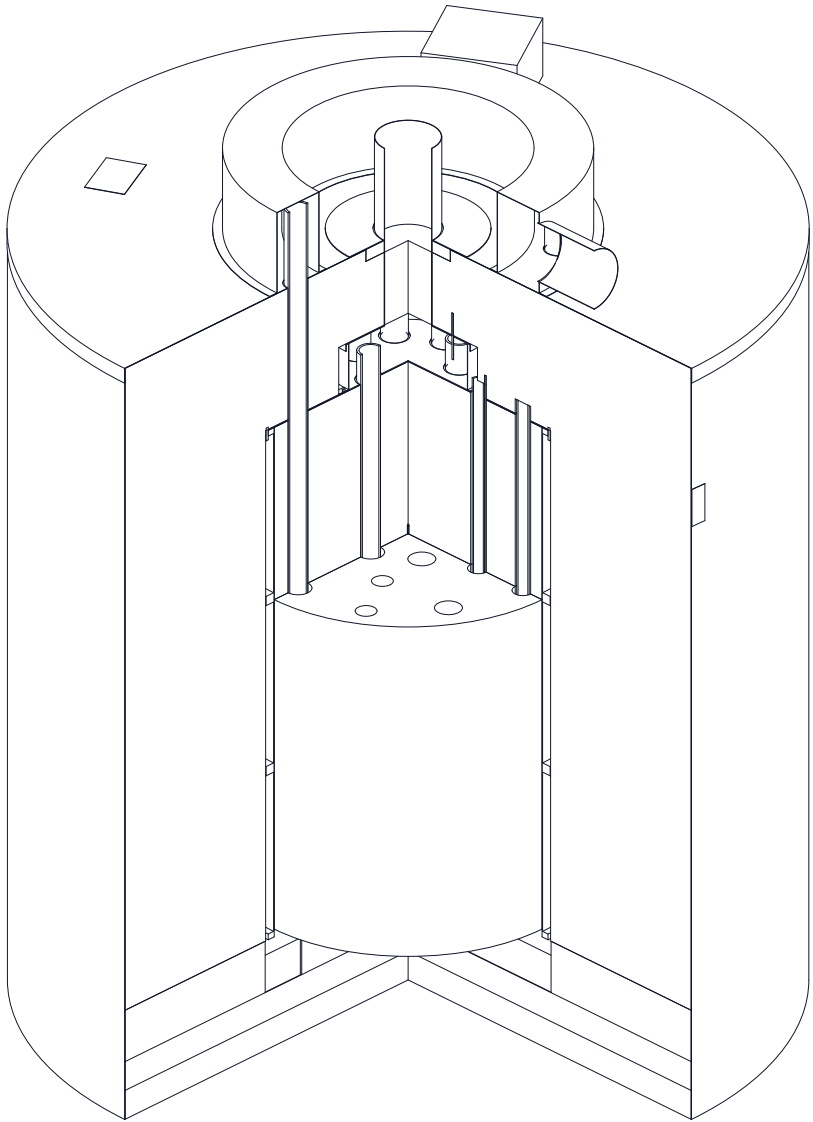

ISOMETRIC CUTAWAY

Quarter removed, not to scale; seen from the front right and above, about 30 deg elevation

KEY DATA AND NOTES

STORAGE	210 kg dry silica sand, 18.3 kWh(th) between 150 and 450 °C mean
CHARGE	12 cartridge heaters, 250 W each, 3.0 kW at 240 V; sand and well wall 550 °C max
DISCHARGE	Six 1-1/4 in U-tubes, 1.0 kW rated, 1.5 kW boost; supply air 50 °C via mixing tee
ENVELOPE	1,209 mm dia x 1,462 mm high; about 415 kg; slab floor only
SECTION A-A	Front view is cut on the XZ plane through four heater wells; sand omitted for clarity
SAND LEVEL	571 mm above drum floor; headspace filled with 298 mm AES blanket and stone wool
LABELS	HOT SURFACES INSIDE on the jacket, HOT OUTLET on the cap, DANGER 240 V on the junction box (96 x 64 and 90 x 44 mm)
REFERENCE	TBK-PRC-001 design precis, TBK-CAL-001 sizing, TBK-BLD-001 build plan, bom/bom.csv

REV	DESCRIPTION	DATE	BY
P1	First issue: general arrangement of the v0.2 design	2026-09-24	AC
P2	Made constructable: base, fittings, plenum, cap, box (TBK-DDR-003)	2026-09-30	AC
P3	Warning labels added: jacket, cap, junction box (BOM line 47, TBK-DEC-001)	2026-10-02	AC

THERMABRICK

github.com/BoujeeEnjinia1701/thermabrick

General arrangement

DRAWING NO. TBK-DWG-001		REV P3	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-10-02	DRAWN Amish Chadha
MATERIAL / NOTES Carbon steel drum and pipe; AES blanket and stone wool; galvanized jacket. See bom/bom.csv				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	