



CONCEPT, NOT FOR FABRICATION

ThermaBrick · github.com/BoujeeEnjinia1701/thermabrick


REV	DESCRIPTION	DATE	BY
P3	Concept sheet	2026-09-30	AC

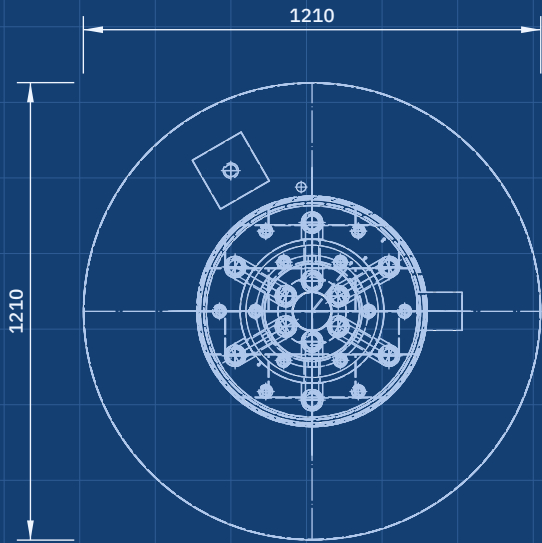


TOP VIEW
Scale 1:20; looking down (along -Z)

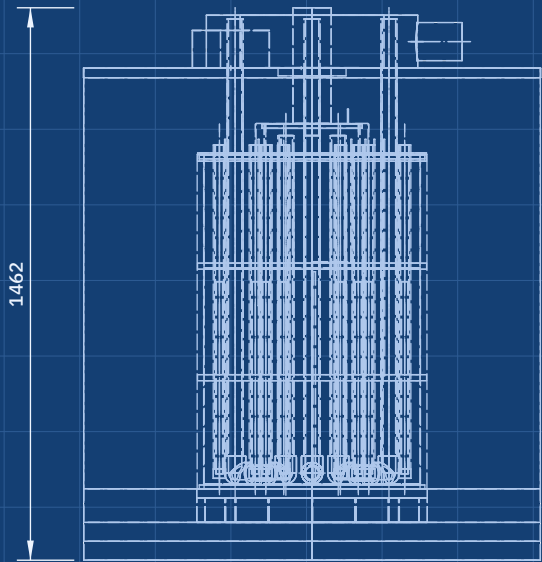

FRONT VIEW
Scale 1:20; looking at the front (along +Y)

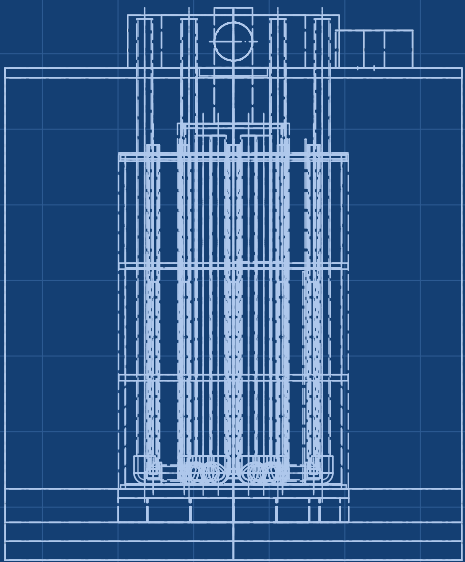

RIGHT VIEW
Scale 1:20; looking at the right side (along -X)

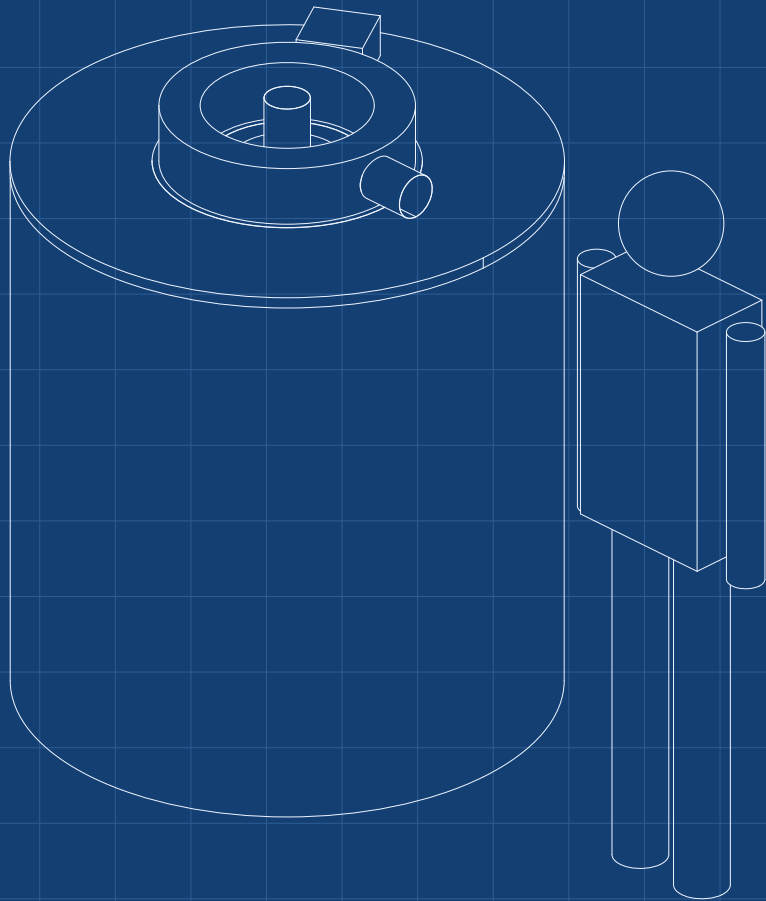

ISOMETRIC VIEW
Not to scale; figure is a 1.75 m person; seen from the front right and above, about 30 deg elevation

KEY FIGURES

18.3 kWh(th) stored, 150 to 450 °C
210 kg silica sand in a 55 US gal drum
3.0 kW charge, 12 x 250 W heaters, 240 V
Full charge 9.6 h (R3 asks 8 h: not met)
1.0 kW warm air held for 14.3 h
Standby loss 459 W at full charge
1,209 mm dia. x 1,462 mm high
Source: TBK-CAL-001 v0.3

THERMABRICK

github.com/BoujeeEnjinia1701/thermabrick

Concept overview

DRAWING NO. TBK-DWG-006		REV P3	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-09-30	DRAWN Amish Chadha
MATERIAL / NOTES Massing model for concept communication				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	