



CONCEPT, NOT FOR FABRICATION


REV	DESCRIPTION	DATE	BY
P1	First issue: controller enclosure, 250 x 200 x 150 mm	2026-09-24	AC

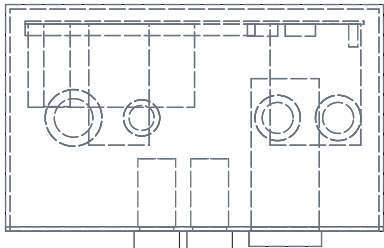


TOP VIEW
Scale 1:5

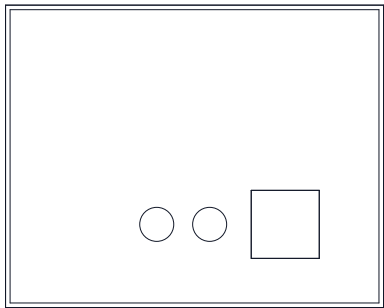

FRONT VIEW
Scale 1:5



RIGHT VIEW
Scale 1:5

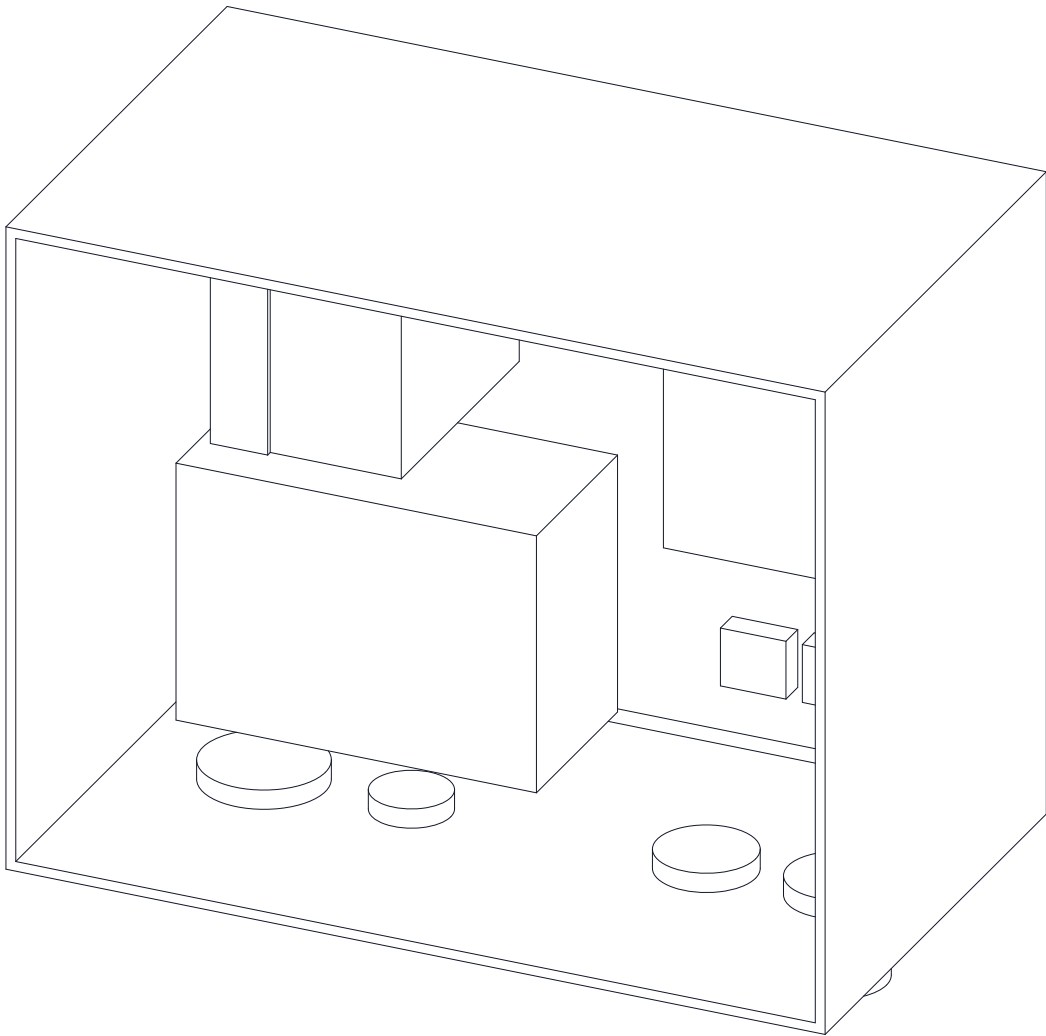

ISOMETRIC, LID REMOVED
Lid parts hidden, not to scale

KEY DATA AND NOTES	
ENCLOSURE	250 x 200 x 150 mm polycarbonate, UL 94 V-0 or 5VA, IP65; steel mounting plate bonded to PE
LID CUTOUTS	REX-C100 45 x 45 mm at x 60, z 55; STOP and START 22.5 mm dia at x -25 and 10, z 55
GLANDS	Bottom face at y 75: M25 x -80 (thermocouples), M16 x -35 (blower), M20 x 55 (supply), M20 x 95 (heaters)
PLATE	DIN rail at z 145: HDR-15-12 12 V supply, JQX-30F relay socket. SSR on heat sink top right; controller bottom left
CLEARANCE	Fit check: every part clears by 3 mm; REX-C100 body ends 36 mm from the plate
DATUM	x from the enclosure centerline, z up from the bottom face, y into the box from the lid
REFERENCE	TBK-DWG-003 schematic, TBK-PRC-002, bom/bom-test-article.csv

THERMABRICK

Controller enclosure layout

DRAWING NO. TBK-DWG-005		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-09-24	DRAWN Amish Chadha
MATERIAL / NOTES Polycarbonate enclosure, steel mounting plate. Part envelopes from supplier data				
Licensed CERN-OHL-S-2.0 · Open Hardware Portfolio · amishchadha.com				Generated from cad/src; do not edit by hand