


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC




TOP VIEW
Scale 1:10; looking down (along -Z)

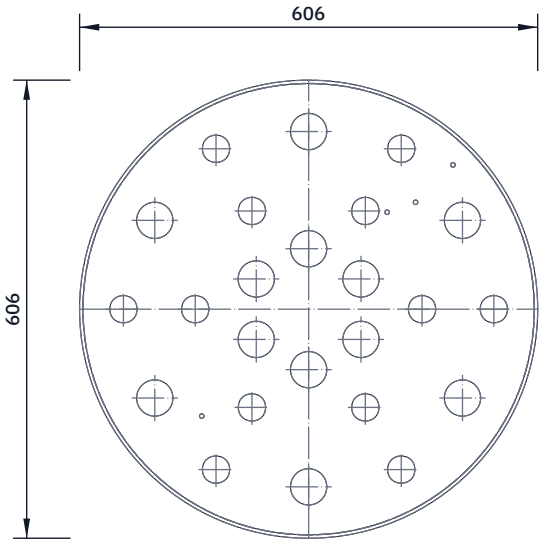

FRONT VIEW
Scale 1:10; looking at the front (along +Y)



RIGHT VIEW
Scale 1:10; looking at the right side (along -X)

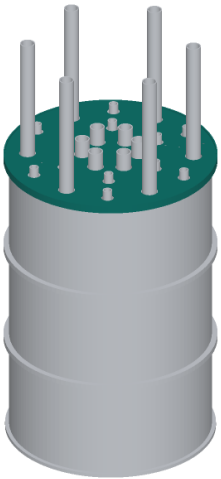

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Drill the lid with the template (TBK-DWG-103) clamped on it as a guide.

Twelve 36 mm holes for the heater wells: six on a 150 mm radius at 0, 60, 120 ... degrees and six on a 245 mm radius at the same angles.

Twelve 48 mm holes for the U-tube legs: six on 80 mm and six on 235 mm radius at 30, 90, 150 ... degrees (between the wells).

Four 6 mm holes for the sand thermocouples (lid layout picture).

Cut with bi-metal hole saws at low speed with cutting oil; deburr.

Mark a line at 0 degrees on the lid and the drum rim to line them up.

Fit: the lid drops over all 24 pipe ends, the well holes leaving a 4.6 mm gap (a T1 to T3 sheath fits beside its well) and the leg holes 2.9 mm. An AES rope collar is laid round every pipe on the lid.

Check: lay the template on the lid; every hole lines up.

ThermaBrick drum lid: drilling sketch

DRAWING NO. TBK-DWG-102			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES The drum's own 16 ga steel lid and bolted closing ring					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	