


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC



TOP VIEW

Scale 1:10; looking down (along -Z)

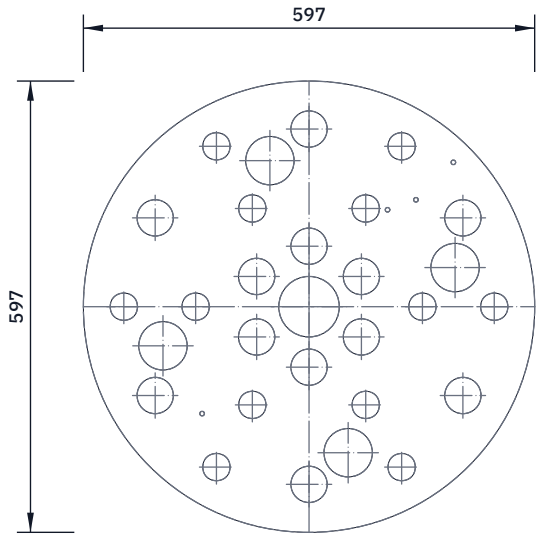


FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

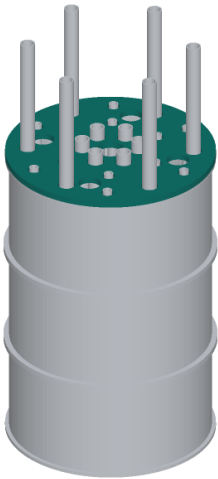

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

A temporary jig. Cut a 597 mm disc from 18 mm plywood: it sits on the drum's top rim, where the lid will go.

Drill the same holes as the lid (36 mm wells, 48 mm legs, 6 mm sheaths) from the lid layout picture, with the 0 degree line marked.

Pour holes: one 80 mm hole in the centre and four 64 mm holes on a 200 mm radius at 15, 105, 195 and 285 degrees.

Drill the template first and use it to drill the lid, so both match.

Fit: the template drops over the pipe ends and holds every well, U-tube leg and sheath upright while sand is poured through the pour holes. Lift it off before the headspace insulation goes in.

Check: it lies flat on the rim with all 24 pipes through it.

THERMABRICK

github.com/BoujeeEnjinia1701/thermabrick

ThermaBrick setting template: making sketch

DRAWING NO. TBK-DWG-103			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Exterior plywood 18 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	