
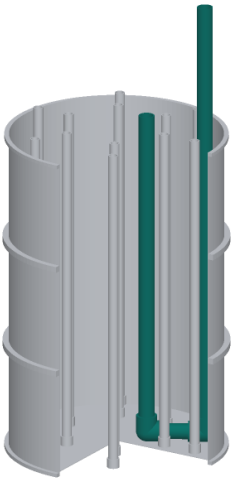


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC




WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut six inlet legs 1175 mm long (two per 10 ft pipe) and six outlet legs 866 mm (three per pipe). Thread one end of each. Degrease, coat every thread with nickel anti-seize, then join: outlet leg, elbow, 4 in nipple, elbow, inlet leg, wrench tight. Turn the second elbow so both legs stand parallel, in one plane. Leg centres 155 mm apart (the fittings make 155.6 mm). The elbows rest on the drum floor; the run is 28 mm above it. Fit: the short leg (outlet) stands on the 80 mm circle and ends inside the collector; the long leg (inlet) on the 235 mm circle, ending inside the inlet plenum, 130 mm above the jacket cap. Check: legs parallel within 3 mm over their length; blow through it to clear swarf.

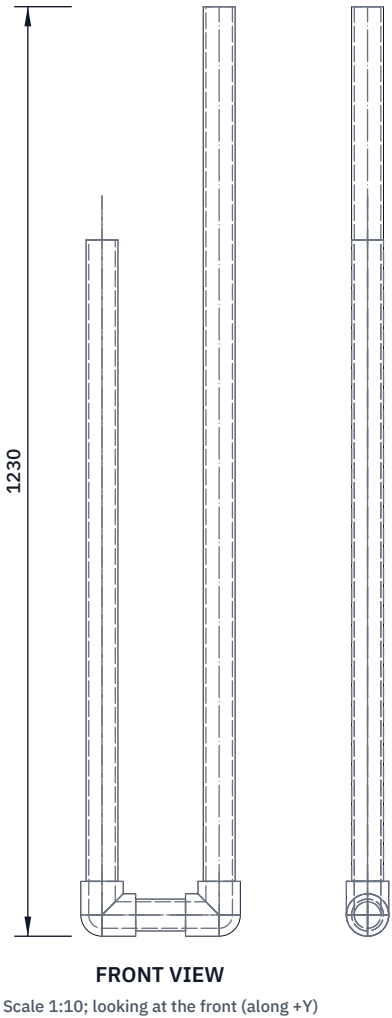

THERMABRICK				github.com/BoujeeEnjinia1701/thermabrick			
ThermaBrick U-tube (make 6): making sketch							
DRAWING NO. TBK-DWG-105			REV P1		SHEET 1 of 1		SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 		DATE 2026-09-30		DRAWN Amish Chadha	
MATERIAL / NOTES Black steel pipe 1-1/4 in Sch 40; two 90 degree elbows; 1-1/4 x 4 in nipple							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com						Generated from cad/src; do not edit by hand	