



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC




TOP VIEW

Scale 1:10; looking down (along -Z)




FRONT VIEW

Scale 1:10; looking at the front (along +Y)



RIGHT VIEW

Scale 1:10; looking at the right side (along -X)

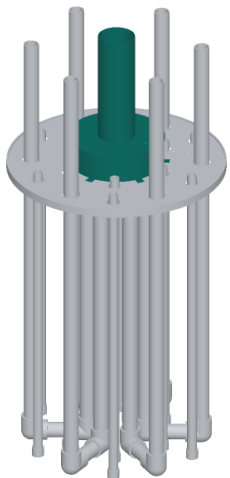

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Ring: cut an 80 mm band from 10 in (254 mm) black stovepipe.

Tabs: at the foot, at 30, 90, 150 ... degrees, cut six slits 20 mm deep and 20 mm apart and fold the tabs out flat. Drill each for a 4.8 mm steel rivet, 10 mm from the ring.

Top: cut a 266 mm disc from 18 ga uncoated steel, fold a 12 mm edge down over the ring and rivet it in six places.

Cut a 4 in hole in the middle and rivet in the 4 in crimped start collar; fit the 4 in pipe to 160 mm above the jacket cap.

Drill a 4 mm hole 95 mm from the centre for thermocouple T8.

Fit: tabs riveted to the lid between the inner wells; AES rope pressed round the foot of the ring. The six short legs end inside it.

No zinc: use uncoated steel and steel rivets only.

THERMABRICK

github.com/BoujeeEnjinia1701/thermabrick

ThermaBrick collector and outlet: making sketch

DRAWING NO. TBK-DWG-106			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES 10 in black stovepipe 24 ga; 18 ga steel sheet; 4 in start collar and pipe					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	