



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC

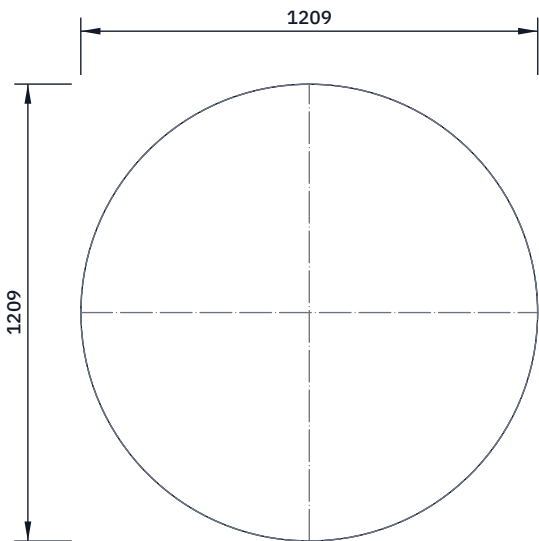


TOP VIEW

Scale 1:20; looking down (along -Z)

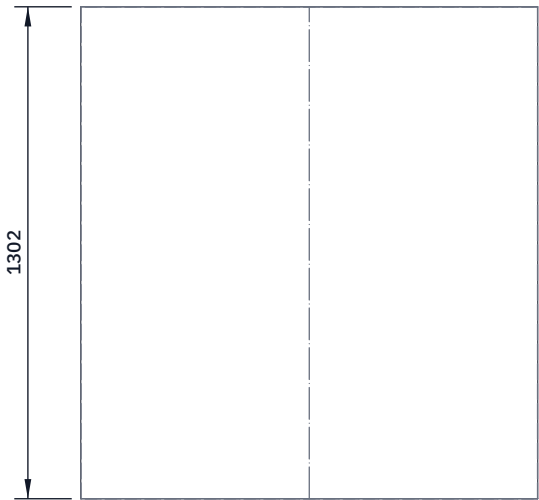


FRONT VIEW

Scale 1:20; looking at the front (along +Y)

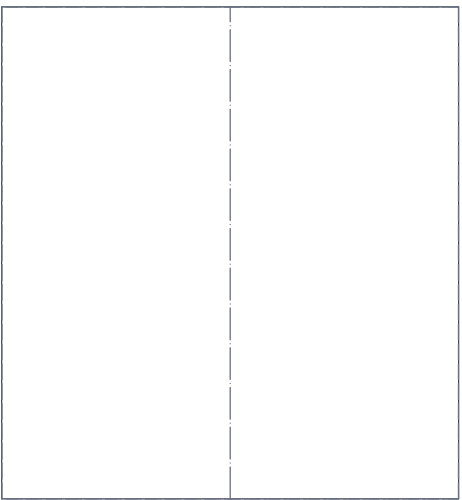

RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

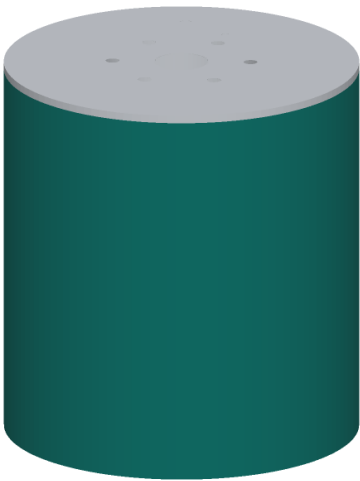

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Three rows of 610 mm flashing, each 3,850 mm long (3,800 mm round plus a 50 mm lap), wrapped round the side insulation.

Bottom row on the floor; the second laps 25 mm outside it; the top row is cut to width so the side ends 1,302 mm above the floor.

Pull each row tight with ratchet straps over the insulation, then rivet the vertical lap every 100 mm with 4.8 mm aluminium rivets.

Rivet the row laps every 150 mm. Stagger the vertical laps.

Inside diameter 1,208 mm: the insulation is 317 mm thick all round.

Fit: the cap's 25 mm skirt sits outside the top row and is held by sheet metal screws (not rivets) so the cap can come off.

The jacket runs at about 26 degrees C, so galvanized steel is fine.

Check: round within 10 mm on two diameters; no gaps at the laps.

THERMABRICK

github.com/BoujeeEnjinia1701/thermabrick

ThermaBrick jacket side: making sketch

DRAWING NO. TBK-DWG-107			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Galvanized steel flashing 0.6 mm, 610 mm wide coil					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand		