


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC



TOP VIEW

Scale 1:20; looking down (along -Z)

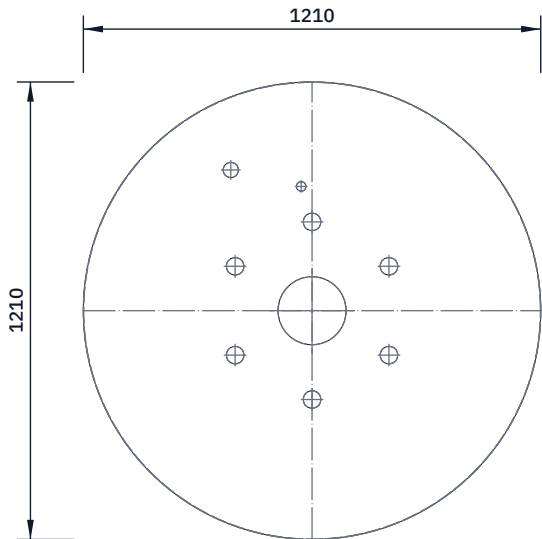


FRONT VIEW

Scale 1:20; looking at the front (along +Y)



RIGHT VIEW

Scale 1:20; looking at the right side (along -X)

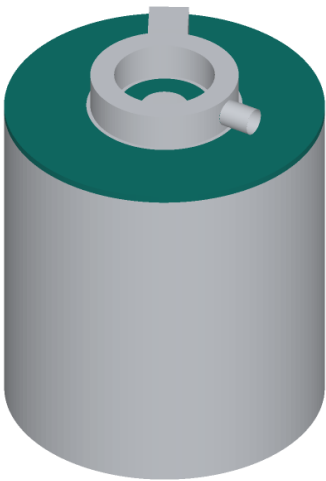

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Three strips of 610 mm flashing, 1,260 mm long, lapped 25 mm and riveted into one sheet; cut a 1,260 mm disc.

Snip the edge every 50 mm, 25 mm deep, and turn it down 90 degrees to make the skirt (1,210 mm inside).

Holes (cap layout picture): 180 mm in the centre for the outlet; six

46 mm on a 235 mm radius at 30, 90 ... degrees for the inlet legs;

40 mm at 120 degrees, 430 mm out, under the junction box; 25 mm at 95 degrees, 330 mm out, for the thermocouple exit.

Fit grommets in the 40 and 25 mm holes; foil tape round the legs.

Fit: it lowers over the six inlet legs and the outlet and rests on the top insulation; eight screws through the skirt into the side.

Check: every hole lines up with its pipe before it is pressed down.

THERMABRICK

github.com/BoujeeEnjinia1701/thermabrick

ThermaBrick jacket cap: making sketch

DRAWING NO. TBK-DWG-108			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES Galvanized steel flashing 0.6 mm, 610 mm wide coil					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	