



CONCEPT, NOT FOR FABRICATION


REV	DESCRIPTION	DATE	BY
P1	First issue: reduced-scale test article	2026-09-24	AC
P2	Bricks moved under the chime; U-tube legs to 36 in nipple length; stack follows	2026-09-24	AC




TOP VIEW
Scale 1:20

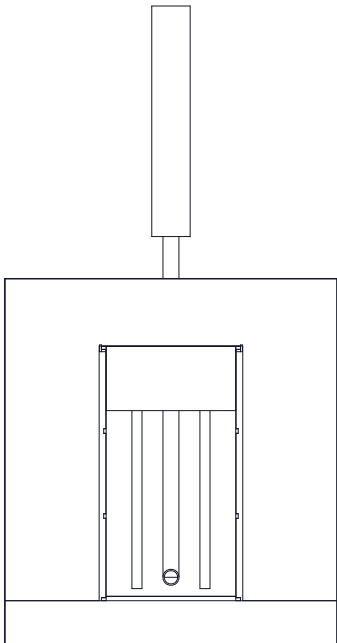

FRONT VIEW
Scale 1:20

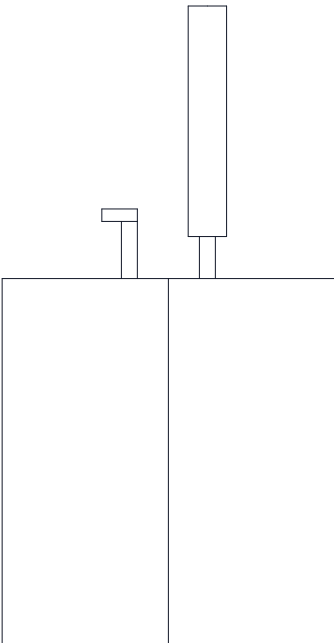

RIGHT VIEW
Scale 1:20

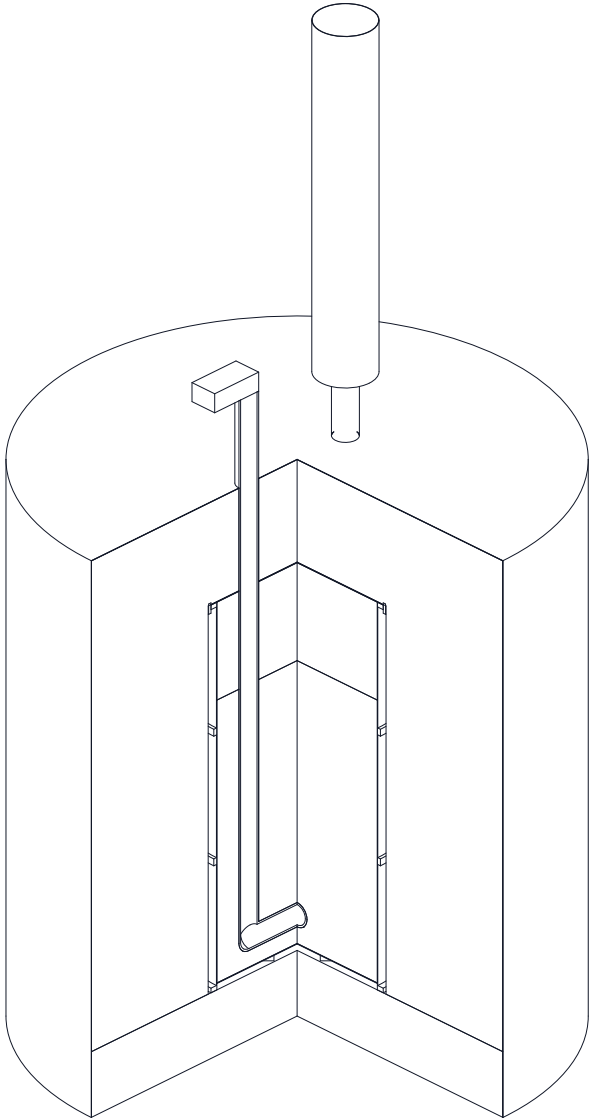

ISOMETRIC CUTAWAY
Quarter removed, not to scale

KEY DATA AND NOTES	
STORAGE	68 kg dry silica sand, 5.9 kWh(th) between 150 and 450 °C mean
CHARGE	4 cartridge heaters, 250 W each, 1.0 kW at 120 V plug-in; well wall 550 °C max
DISCHARGE	One 1-1/4 in U-tube, 12 V blower on the inlet leg, 4 in dilution stack on the outlet
ENVELOPE	880 mm dia x 1,688 mm high incl. stack; about 115 kg
SECTION A-A	Front view is cut on the XZ plane; sand omitted for clarity
SAND LEVEL	491 mm above drum floor; wells and cells match the full-scale design
REFERENCE	TBK-PRC-002 test article precis, TBK-CAL-002 sizing, bom/bom-test-article.csv

THERMABRICK

Test article general arrangement

DRAWING NO. TBK-DWG-002		REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-09-24	DRAWN Amish Chadha
MATERIAL / NOTES Carbon steel drum and pipe; stone wool; aluminum jacket. See bom/bom-test-article.csv				
Licensed CERN-OHL-S-2.0 · Open Hardware Portfolio · amishchadha.com				Generated from cad/src; do not edit by hand