



CONCEPT, NOT FOR FABRICATION

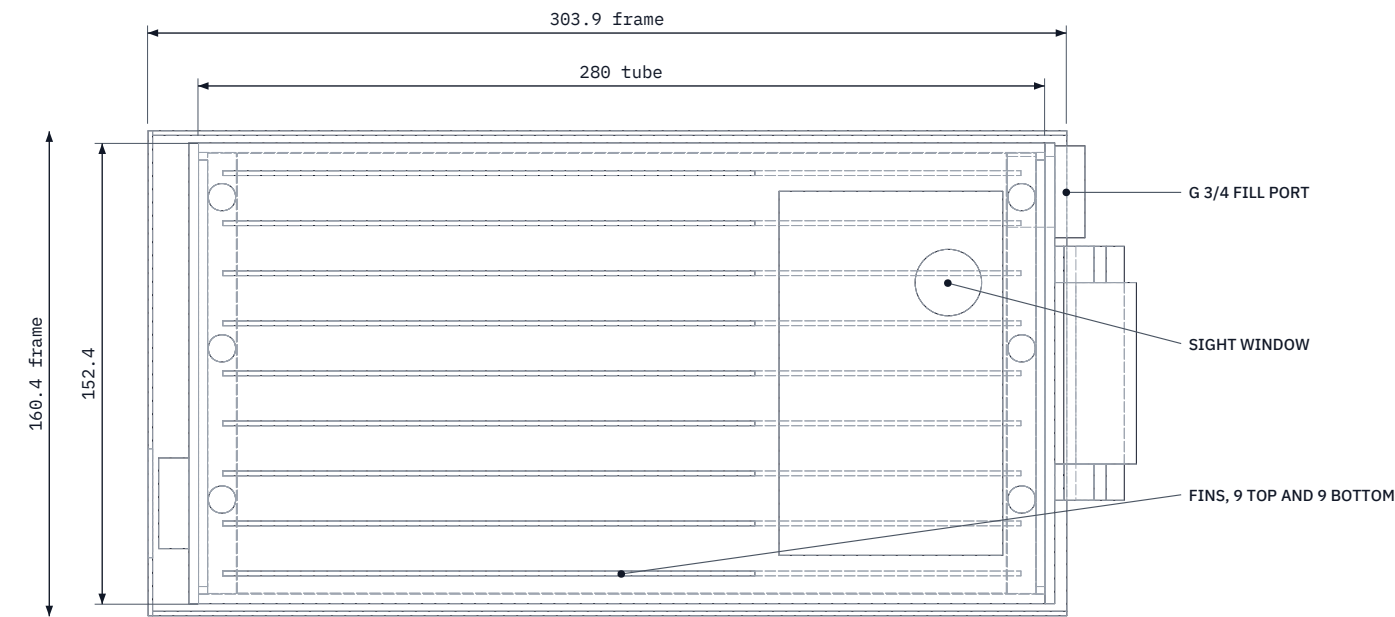


TOP VIEW

Scale 1:2.5

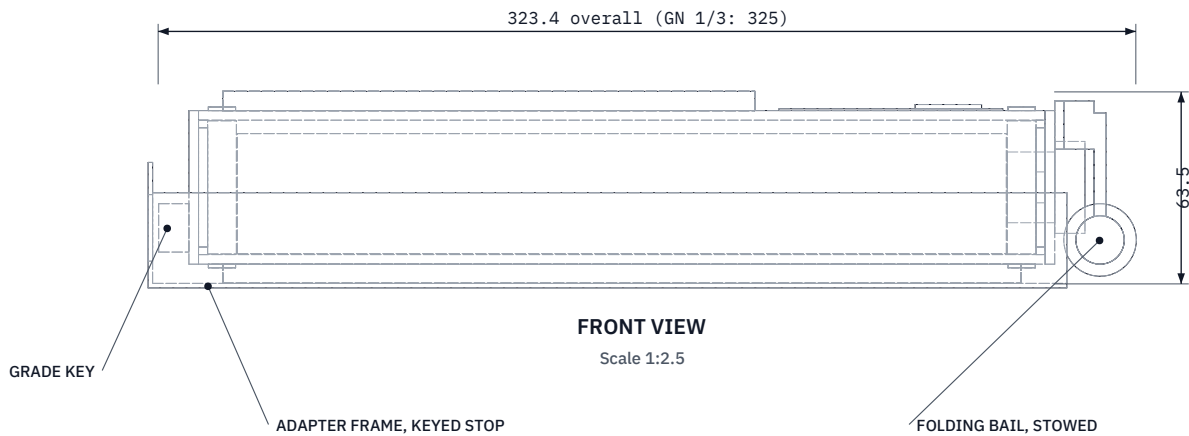


FRONT VIEW

Scale 1:2.5

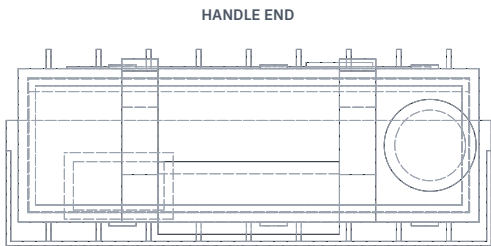

RIGHT VIEW

Scale 1:2.5

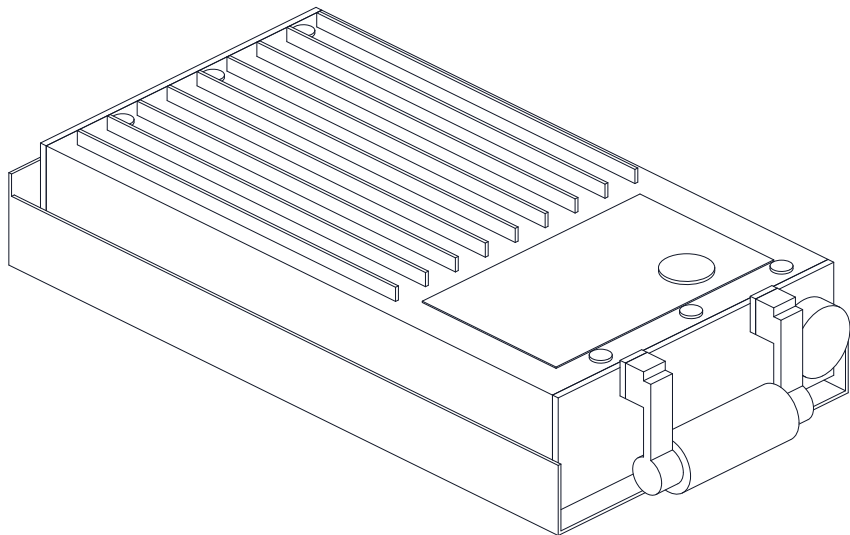

ISOMETRIC VIEW

Not to scale

MAIN DIMENSIONS AND INTERFACES (MM)

Shell 6 x 2 x 1/8 in tube, 280 long; inner 146.1 x 44.4 x 254.9

Inner volume 1.655 L; filled to 90 % as liquid at the grade limit

Fins 9 top, 9 bottom, 6.35 x 1.59 on 16.6 pitch

Caps: 3.175 flange, 3 gland spacer, 9.525 plug; FKM 3 mm cord

Six radial M5 screws per cap; G 3/4 fill port in the handle-end cap

Folding bail on 3 phenolic thermal break; finger gap 39 when raised

Key tab 30 wide, 16 high; centre Y: C5 -43, C25 +0, H70 +43, W0 -61

Frame 1.5 sheet, 304 x 160; end stop slot = key + 3 each side

Finish: shell, fins and caps etch-primed, matte black high-temp paint (e about 0.9)

H70 label rule: from an oven use oven gloves or wait 12 min; pad charging preferred

Sized in TCT-CAL-001; shown: C5 key and C5 frame

Third-angle; front view from -Y; handle end at +X

THERMACART

General arrangement, TC-L in frame

DRAWING NO.

TCT-DWG-001

REV

P2

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:2.5

UNITS

mm

PROJECTION



DATE

2026-09-25

DRAWN

Amish Chadha

MATERIAL / NOTES

6063-T52 tube, 6061 caps, 5052 frame; FKM seals; matte black finish. PRELIMINARY, NOT FOR FABRICATION