



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

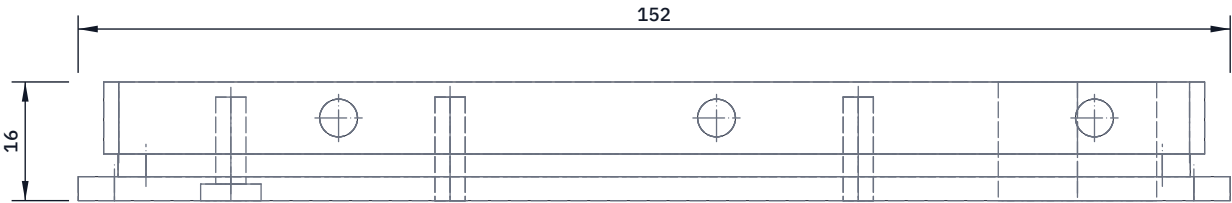


TOP VIEW

Scale 1:1; looking down (along -Z)

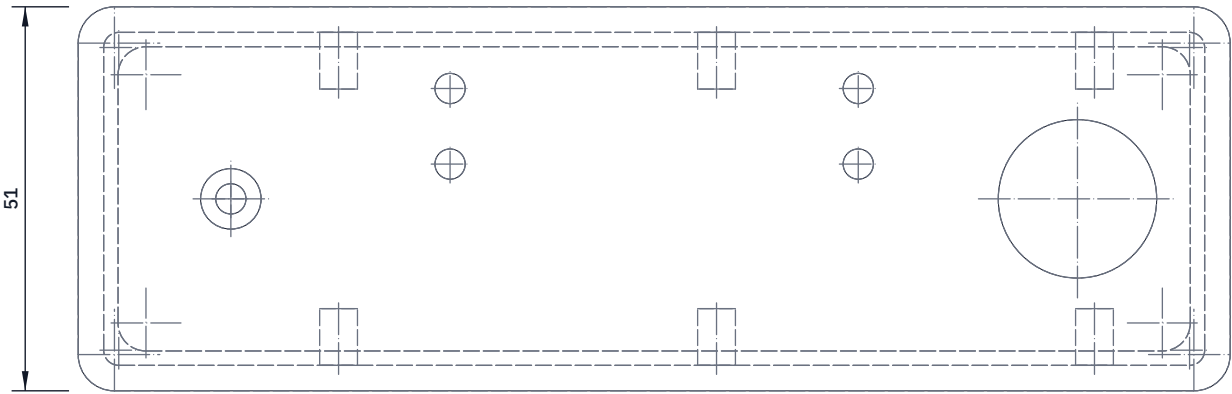


FRONT VIEW

Scale 1:1; looking at the front (along +Y)

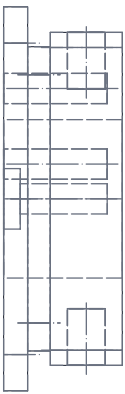

RIGHT VIEW

Scale 1:1; looking at the right side (along -X)

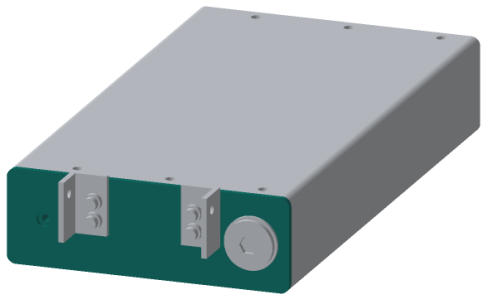

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Three plates, bonded face to face with the epoxy, then drilled.
Flange 3.175 mm: 152.4 x 50.8, 4.8 mm corners (the tube's outside).
Spacer 3 mm: the measured bore less 4.2 mm each way
(about 141.85 x 40.25), 3.7 mm corners. The O-ring goes round it.
Plug 9.525 mm: the bore less 0.4 mm (about 145.65 x 44.05), 2 mm corners. Centre spacer and plug on the flange; bond and clamp.
Seen from outside, handle end; sizes from the centre line, heights from the flange's bottom edge (layout picture in the plan):
fill port G 1/2 at 56 toward the back, 25.4 up, tapped through;
lug bolts M4 at 27 each side, 30 and 40 up; one M4 countersunk stack screw at 56 toward the front, 25.4 up. All M4 holes 4.5 through flange and spacer, tapped 7.5 deep into the plug only.
Radial holes: tap M5 7.5 deep into the plug edges (with the tube).
Check: the stack slides into the tube without the O-ring.

THERMACART

github.com/BoujeeEnjinia1701/thermacart

ThermaCart handle-end cap stack (flange, spacer, plug): making sketch

DRAWING NO. TCT-DWG-103			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES 6061 plate 3.175, 3 and 9.525 mm; structural epoxy					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand