




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

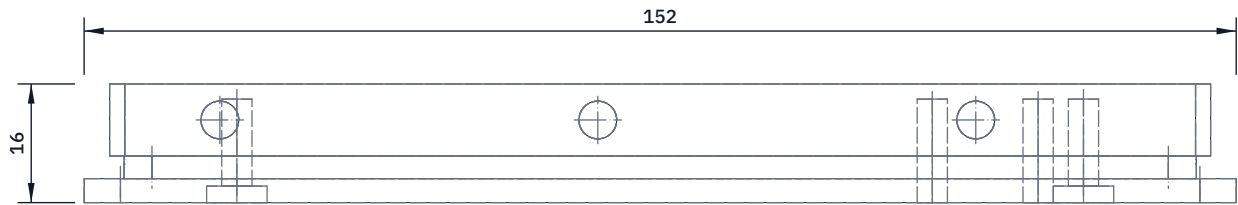


TOP VIEW
Scale 1:1; looking down (along -Z)

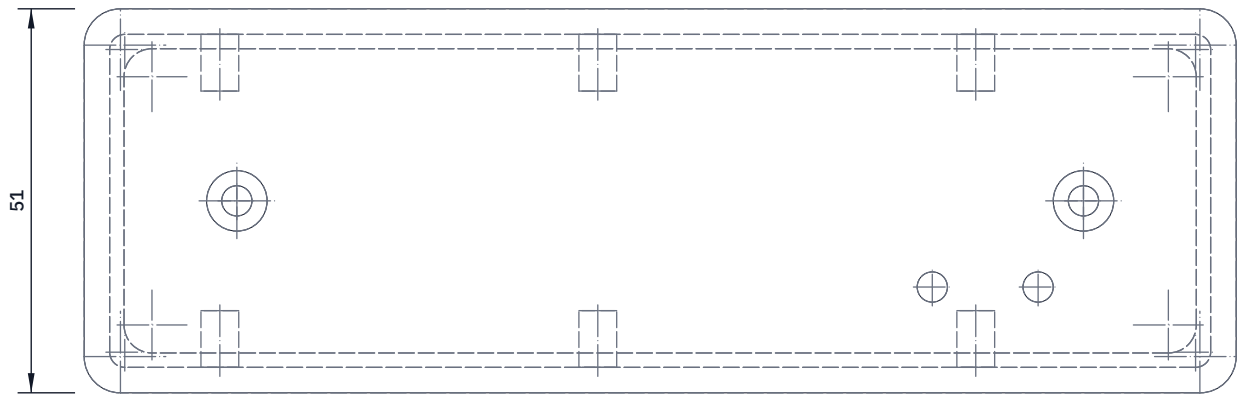

FRONT VIEW
Scale 1:1; looking at the front (along +Y)



RIGHT VIEW
Scale 1:1; looking at the right side (along -X)

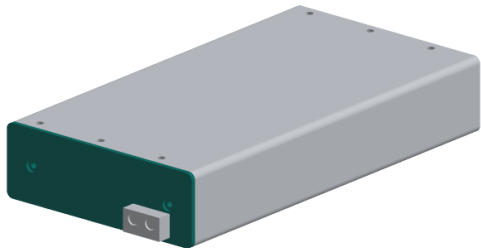

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Same three plates as the handle end, cut and bonded the same way.
Seen from outside, key end; sizes from the centre line, heights from the flange's bottom edge:
two M4 countersunk stack screws at 56 each side, 25.4 up;
two M4 key tab screws 7 each side of the key centre, 14 up.
C5 key centre: 43 toward the front (C25 0, H70 43 toward the back).
M4 holes: 4.5 through flange and spacer, tapped 7.5 deep in the plug, never through it (the plug's inner face is wet).
No fill port at this end.
Radial holes: with the stack in the tube (no O-ring yet), drill 4.2 mm through each tube hole into the plug edge, 7.5 deep; take the stack out, tap M5, open the tube holes to 5.5 mm.
Prime and paint the flange's outer face only.
Check: flange sits flat on the tube end all round.

THERMACART

github.com/BoujeeEnjinia1701/thermacart

ThermaCart key-end cap stack (flange, spacer, plug): making sketch

DRAWING NO. TCT-DWG-104		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:1	UNITS mm	PROJECTION 	DATE 2026-10-01	DRAWN Amish Chadha
MATERIAL / NOTES 6061 plate 3.175, 3 and 9.525 mm; structural epoxy				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	