



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC

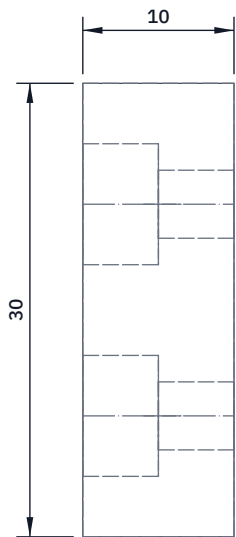


TOP VIEW

Scale 2:1; looking down (along -Z)




FRONT VIEW

Scale 2:1; looking at the front (along +Y)

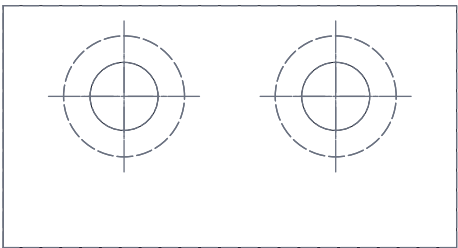

RIGHT VIEW

Scale 2:1; looking at the right side (along -X)

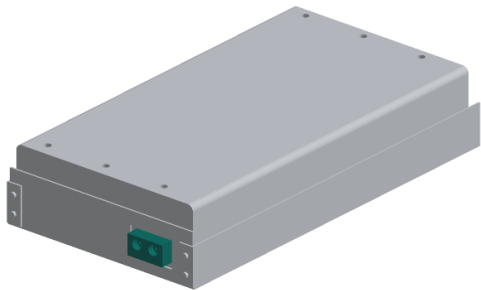

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 16 mm off 30 x 10 mm flat bar: 30 wide, 16 tall, 10 deep.

Two 4.5 mm holes through the 10 mm depth, 8 mm in from each end (14 mm apart), 10 mm up from the bottom face.

Counterbore both from the front face 8 mm across, 5 mm deep, so the M4 x 16 socket cap screw heads sit below the face.

Break the front edges by 1 mm so it finds the slot easily.

Fit: back face flat on the key-end flange, bottom 4 mm above the flange's bottom edge, centre at the grade position:

C5 43 mm toward the front, C25 on the centre line,

H70 43 mm toward the back.

Leave it bare aluminium; stamp the grade on its top face.

Check: 3 mm clear of the frame slot all round when seated.

THERMACART

github.com/BoujeeEnjinia1701/thermacart

ThermaCart key tab (C5 shown): making sketch

DRAWING NO. TCT-DWG-105			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-10-01		DRAWN Amish Chadha
MATERIAL / NOTES 6061 flat bar 30 x 10 mm					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand