


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-01	AC
P2	Arms 36 mm between holes (raised grip)	2026-10-02	AC




TOP VIEW
Scale 2:1; looking down (along -Z)

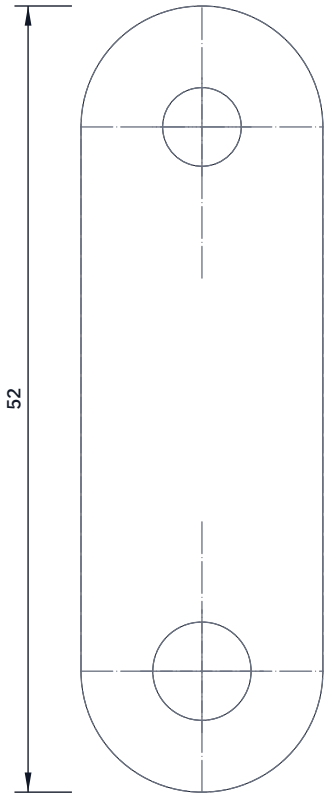

FRONT VIEW
Scale 2:1; looking at the front (along +Y)



RIGHT VIEW
Scale 2:1; looking at the right side (along -X)

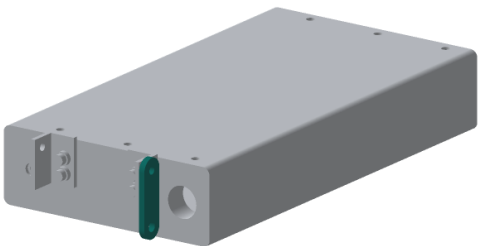

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut two 52 mm lengths of 16 x 4 mm flat bar.

Round both ends to an 8 mm radius (file to a scribed circle).

Two holes on the centre line, 8 mm from each end (36 mm apart):

5.2 mm at the top (pivot), 6.5 mm at the bottom (rod end).

Drill the two arms clamped together so the holes match.

Fit: the arm lies flat on the outside of the angle's upright leg;

a 5 mm stainless pin goes through both, head inside the angle,

nyloc nut outside the arm, snug so the arm still swings.

The rod end butts on the arm's inside face; one M6 x 12

button-head screw through the arm into the rod.

Stowed, the arm hangs straight down; raised, the grip is

39 mm from the end face (room for fingers).

Check: hole centres 36 mm apart, within 0.5 mm.

THERMACART				github.com/BoujeeEnjinia1701/thermacart			
ThermaCart bail arm (make 2): making sketch							
DRAWING NO. TCT-DWG-107			REV P2		SHEET 1 of 1		SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 		DATE 2026-10-02		DRAWN Amish Chadha	
MATERIAL / NOTES 6060 flat bar 16 x 4 mm							
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com						Generated from cad/src; do not edit by hand	